


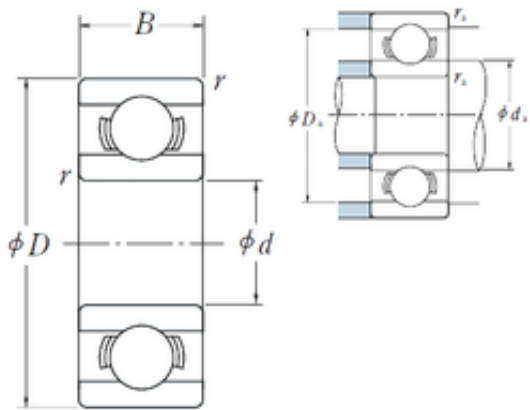

Bearing No. 627

r	0.3
d	7 mm
D	22 mm
B	7 mm
C	7 mm
B0	7
D_	22
B_	7
ra	0.3
Cr	335
C0	1.37
da	9
Z_	7
fo	12.424
SRE	2.22
DE_	18.969
D_a	20
DI_	11.031
DA_	3.969
SRI	2.04
C0r	140
SDM_	15
SRIX	0.015
Bore	0.276 Inch 7 Millimeter
SREN	0
Noun	Bearing
mass	12.7
KBRG	6101
SREX	0.03
yobi	627

SRIN	-0.015
r min.	0,3 mm
LangID	1
Weight	0,0127 Kg
UNSPSC	31171504
GRS rpm	30000
ra max.	0,3 mm
Da max.	20 mm
Oil rpm	36000
hidYobi	627
da min.	9 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSESBM
Size (mm)	7x22x7
Enclosure	Open
Snap Ring	No
Inventory	0.0
bore type:	Round
Prod_Type3	ESM_MD_OT
Width (mm)	7
maximum rpm:	36000 rpm
Weight / LBS	0.031
Inch - Metric	Metric
Product Group	B00308
Cage Material	Steel
closure type:	Open
Bearing number	627
bore diameter:	7 mm
cage material:	Steel Cage
overall width:	7 mm
Keyword String	Ball
finish/coating:	Uncoated

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.276 Inch 7 Millimeter
Manufacturer URL	http://www.nskamericas.com
Long Description	7MM Bore; 22MM Outside Diameter; 7MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	0.866 Inch 22 Millimeter
Weight / Kilogram	0.01
Manufacturer Name	NSK
precision rating:	ABEC1, P0
outside diameter:	22 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	7
internal clearance:	C0
Outer Diameter (mm)	22
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	3300 N
Manufacturer Item Number	627
Internal Special Features	No
(Grease) Lubrication Speed	30 000 r/min
Basic static load rating (C0)	1,37 kN

Basic dynamic load rating (C)	3,3 kN
Maximum Capacity / Filling Slot	No