


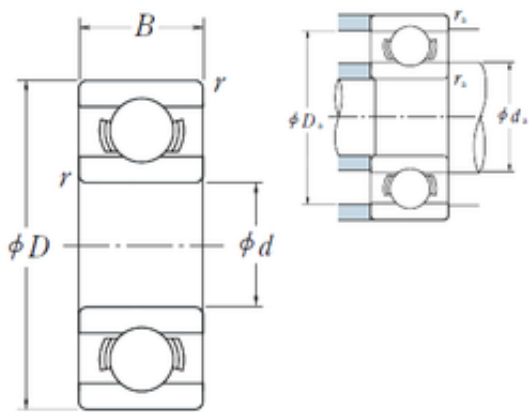

Bearing No. 629

r	0.3
d	9 mm
D	26 mm
B	8 mm
C	8 mm
B0	8
D_	26
B_	8
ra	0.3
Cr	465
C0	1.97
da	11
Z_	7
fo	12.411
C0r	201
DE_	22.762
SRI	2.46
D_a	24
DI_	13.238
DA_	4.762
SRE	2.67
SDM_	18
SRIX	0.015
Bore	0.354 Inch 9 Millimeter
mass	19.5
Noun	Bearing
SREN	-0.015
KBRG	6101
SREX	0.015
yobi	629

SRIN	-0.015
r min.	0,6 mm
LangID	1
Weight	0,0195 Kg
UNSPSC	31171504
GRS rpm	28000
hidYobi	629
ra max.	0,3 mm
Da max.	24 mm
Oil rpm	34000
series:	62
da min.	11 mm
hidTable	ecat_NSESBM
Category	Single Row Ball Bearing
Snap Ring	No
Size (mm)	9x26x8
Inventory	0.0
Enclosure	Open
Prod_Type3	ESM_MD_OT
bore type:	Round
Width (mm)	8
maximum rpm:	34000 RPM
Weight / LBS	0.019
Inch - Metric	Metric
Product Group	B00308
closure type:	Open
Cage Material	Steel
Bearing number	629
Keyword String	Ball
bore diameter:	9 mm
fillet radius:	0.6 mm
cage material:	Steel

overall width:	8 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.315 Inch 8 Millimeter
Outside Diameter	1.024 Inch 26 Millimeter
Long Description	9MM Bore; 26MM Outside Diameter; 8MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer Name	NSK
precision rating:	ABEC 1 (ISO Class Normal)
Weight / Kilogram	0.01
outer ring width:	8 mm
outside diameter:	26 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	9
Outer Diameter (mm)	26
internal clearance:	C0
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	1970 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	4550 N
Manufacturer Item Number	629
Internal Special	No

Features	
(Grease) Lubrication Speed	28 000 r/min
operating temperature range:	Maximum of +250 °F
Basic static load rating (C0)	1,97 kN
Basic dynamic load rating (C)	4,55 kN
Maximum Capacity / Filling Slot	No