


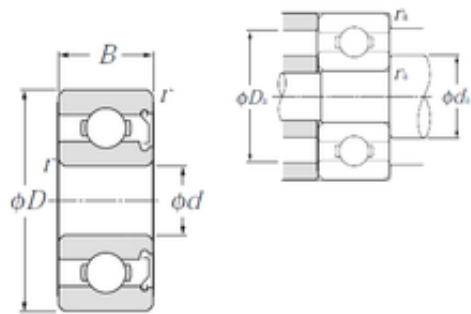

Bearing No. 629X50Z

D	26 mm
d	9 mm
B	8 mm
C	8 mm
f0	12.4
Noun	Bearing
Bore	0.354 Inch 9 Millimeter
Mass	0.02 kg
da min	13 mm
rs min	0.6 mm
ra max	0.6 mm
UNSPSC	31171504
Da max	22 mm
r min.	0,6 mm
da max	13,9 mm
ra max.	0,3 mm
Da max.	22 mm
da min.	13 mm
Category	Single Row Ball Bearing
Enclosure	1 Metal Shield
Inventory	0.0
Size (mm)	9x26x8
Snap Ring	No
Width (mm)	8
Nlim (oil)	35,000 rpm
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Nlim (grease)	30,000 rpm
Other Features	Deep Groove

Keyword String	Ball
Bearing number	629X50Z
Static load, C0	1.96 kN
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Dynamic load, C	4.55 kN
Inner Race Width	0 Inch 0 Millimeter
Long Description	9MM Bore; 26MM Outside Diameter; 8MM Outer Race Width; 1 Metal Shield; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel C
Outside Diameter	1.024 Inch 26 Millimeter
Outer Race Width	0.315 Inch 8 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Name	NTN
Weight / Kilogram	0.019
Bore Diameter (mm)	9
Internal Clearance	C0-Medium
Outer Diameter (mm)	26
Minimum Buy Quantity	N/A
Radial clearance class	CN
Harmonized Tariff Code	8482.10.50.68
Fatigue limit load, Cu	0.09 kN
(Oil) Lubrication Speed	35 000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	30 000 r/min

Basic static load rating (C0)	1,96 kN
Basic dynamic load rating (C)	4,55 kN
Min operating temperature, Tmin	-20 °C
Maximum Capacity / Filling Slot	No
Max operating temperature, Tmax	120 °C