


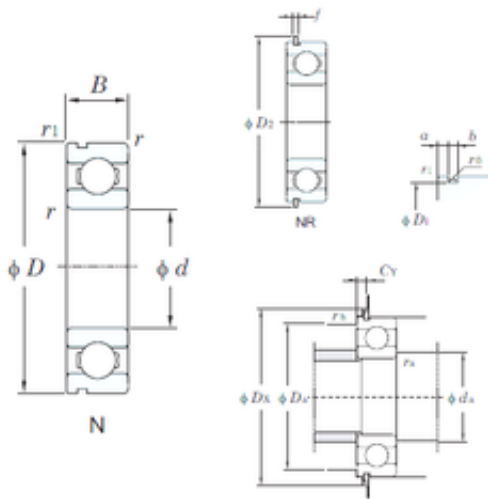

Bearing No. 63/28NR

f	1,65 mm
d	28 mm
D	68 mm
B	18 mm
C	18 mm
a	3,28 mm
b	2,05 mm
Cr	29.4
f0	13.3
Cu	0.990
D2	74,6 mm
D1	64,82 mm
C0r	13.1
Bore	1.102 Inch 28 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,328 Kg
r1(min)	0.5
da(min)	34.5
D2(min)	74.6
Da(max)	61.5
rb(max)	0.5
ra(max)	1
Dx(min)	76
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	34,5 mm

Cy(max)	4.67
Da max.	61,5 mm
Category	Single Row Ball Bearing
Oil lub.	12000
Snap Ring	Yes
Size (mm)	28x68x18
Inventory	0.0
Enclosure	Open
Width (mm)	18
Grease lub.	10000
f{0.05)	1.65
Bearing No.	63/28NR
Weight / LBS	0.72312
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	63/28NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Outer Race Width	0.709 Inch 18 Millimeter
(Refer.)Mass(kg)	0.328
Long Description	28MM Bore; 68MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outside Diameter	2.677 Inch 68 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.334
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	28
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	12000 r/min
Internal Special Features	No
(Grease) Lubrication Speed	10000 r/min
Basic static load rating (C0)	13,1 kN
Basic dynamic load rating (C)	23,5 kN
Maximum Capacity / Filling Slot	No