


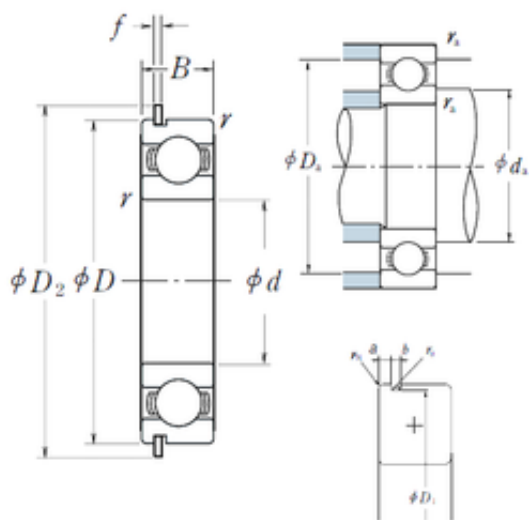

Bearing No. 63/28NR

f	1,7 mm
r	1.1
d	28 mm
D	68 mm
B	18 mm
C	18 mm
a	3,28 mm
b	1,9 mm
D1	64,82 mm
fo	12.4
C0	14
ra	1
D2	74,6 mm
Cy	4.6
ro	0.6
Dx	76
rn	0,5 mm
D_	68
B_	18
Z_	7
SRI	6.41
D_a	61.5
DE_	60.7
SRE	6.73
DA_	12.7
DI_	35.3
Noun	Bearing
SDM_	48
Bore	1.102 Inch 28 Millimeter

SRIX	0.025
SRIN	0
SREX	0.05
SREN	0
KBRG	6101
bomp	0
mass	0.287
yobi	63/28NR
SBRG	3
da min	34.5
Weight	0,287 Kg
UNSPSC	31171504
r min.	1,1 mm
ALPHA_	0
da max	38 mm
LangID	1
C_conv	26700
hidYobi	63/28NR
ra max.	1 mm
Da max.	61,5 mm
Oil rpm	13000
da min.	34,5 mm
GRS rpm	10000
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	28x68x18
Snap Ring	Yes
Enclosure	Open
Width (mm)	18
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.6328
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	63/28NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	28MM Bore; 68MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.677 Inch 68 Millimeter
Weight / Kilogram	0.307
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	28
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	13 000 r/min
Internal Special	No

Features	
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	14 kN
Basic dynamic load rating (C)	26,7 kN
Maximum Capacity / Filling Slot	No