


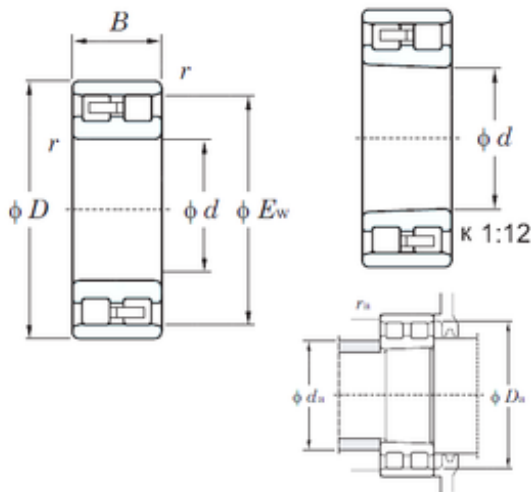

Bearing No. NN3040K

|                    |            |
|--------------------|------------|
| D                  | 310 mm     |
| d                  | 200 mm     |
| B                  | 82 mm      |
| C                  | 82 mm      |
| Fw                 | -          |
| Cu                 | 137        |
| Ew                 | 282 mm     |
| Cr                 | 793        |
| C0r                | 1120       |
| Weight             | 21,8 Kg    |
| r min.             | 2,1 mm     |
| Da min             | 285 mm     |
| r(min)             | 2.1        |
| da(min)            | 211        |
| db(min)            | -          |
| ra max.            | 2 mm       |
| Da(max)            | 299        |
| da(max)            | -          |
| Da max.            | 299 mm     |
| da min.            | 211 mm     |
| Da(min)            | 285        |
| ra(max)            | 2          |
| Oil lub.           | 2100       |
| Size (mm)          | 200x310x82 |
| Width (mm)         | 82         |
| Bearing No.        | NN3040K    |
| Grease lub.        | 1700       |
| Bearing number     | NN3040K    |
| (Refer.)Mass(kg)   | 21.8       |
| Bore Diameter (mm) | 200        |
|                    |            |

|                               |            |
|-------------------------------|------------|
| Outer Diameter (mm)           | 310        |
| (Grease) Lubrication Speed    | 1700 r/min |
| Basic dynamic load rating (C) | 638 kN     |
| Basic static load rating (C0) | 1120 kN    |