


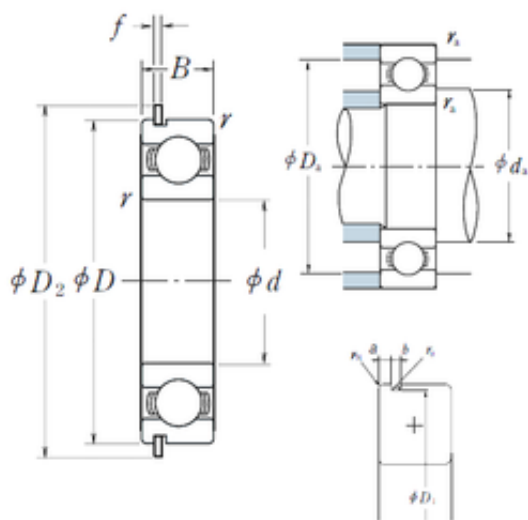

Bearing No. 6301NR

f	1,12 mm
r	1
d	12 mm
D	37 mm
B	12 mm
C	12 mm
a	2,06 mm
b	1,35 mm
D2	41,3 mm
B_	12
Cy	2.9
ra	1
C0	4.2
fo	11.1
D_	37
D1	34,77 mm
rn	0,5 mm
Z_	6
Dx	42
ro	0.4
DE_	32.438
DA_	7.938
SRI	4.01
D_a	32
SRE	4.21
DI_	16.562
SRIN	0
yobi	6301NR
SBRG	3
bomp	0

SREX	0.04
KBRG	6101
SREN	0
SDM_	24.5
SRIX	0.02
mass	0.06
C_conv	9700
r min.	1 mm
da max	18 mm
ALPHA_	0
Weight	0,06 Kg
da min	17
LangID	1
GRS rpm	20000
Da max.	32 mm
hidYobi	6301NR
Oil rpm	24000
da min.	17 mm
r0 max.	0,4 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	12x37x12
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	12
Bearing number	6301NR
Bore Diameter (mm)	12
Outer Diameter (mm)	37
(Oil) Lubrication Speed	24 000 r/min
(Grease) Lubrication Speed	20 000 r/min
Basic dynamic load rating (C)	9,7 kN
Basic static load rating	4,2 kN

(C0)	
------	--