
Loyal | 29248

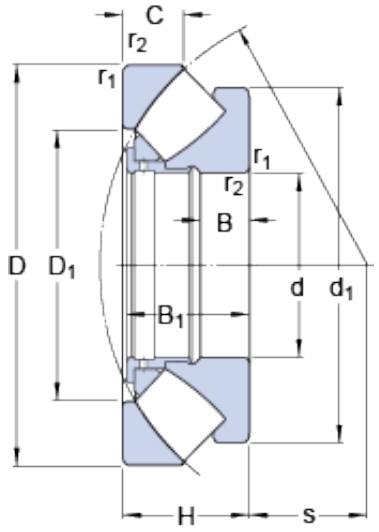

Bearing No. 29248

C	30 mm
d	240 mm
D	340 mm
H	60 mm
B	19 mm
s	130 mm
Noun	Bearing
Banded	No
Bore 2	11.142 Inch | 283 Millimeter
Height	2.362 Inch | 60 Millimeter
Bore 1	9.449 Inch | 240 Millimeter
UNSPSC	31171507
series:	Spherical Roller Thrust Bearing
Category	Thrust Roller Bearings
Size (mm)	340x240x60
Inventory	0.0
Keyword 3	Spherical
Width (mm)	60
Weight / LBS	36.376
Mass bearing	16.5 kg
Inch - Metric	Metric
B_1	57 mm
Self Aligning	Yes
Product Group	B04311
Cage Material	Machined Brass
B_1	57 mm
D_1	283 mm

d_1	330 mm
Bearing number	29248
Other Features	Single Row
Keyword String	Thrust Roller Spherical
Limiting speed	1800 r/min
cage material:	Brass
Thrust Bearing	Yes
overall width:	60 mm
bore diameter:	240 mm
Precision Class	ABEC 1 | ISO P0
Reference speed	1100 r/min
Rolling Element	Spherical Roller Bearing
Outside Diameter	13.386 Inch | 340 Millimeter
Long Description	240MM Bore 1; 283MM Bore 2; 340MM Outside Diameter; 60MM Height; Spherical Roller Bearing; Single Direction; Self Aligning; Not Banded; Machined Brass Cage; ABEC 1 | ISO P0; Roller Assembly plus Racew
Manufacturer URL	http://www.skf.com
Weight / Kilogram	17.375
outside diameter:	340 mm
Manufacturer Name	SKF
d_a min.	290 mm
D_a max.	308 mm
r_a max.	2 mm
Bore Diameter (mm)	340
Outer Diameter (mm)	240
d_a - min.	290 mm
D_a - max.	308 mm

$r_{1,2}$ min.	2.1 mm
Minimum Buy Quantity	N/A
r_a - max.	2 mm
d_1 ?	330 mm
D_1 ?	283 mm
Component Description	Roller Assembly plus Raceways
$r_{1,2}$ - min.	2.1 mm
Harmonized Tariff Code	8482.30.00.40
Manufacturer Item Number	29248
Single or Double Direction	Single Direction
Factor min. axial load - A	1.1
Basic dynamic load rating C	799 kN
Minimum axial load factor A	1.1
operating temperature range:	392 Degrees °F
Basic dynamic load rating - C	799 kN
Fatigue load limit P_u	335 kN
Fatigue load limit - P_u	335 kN
Overall Height with Aligning Washer	0 Inch | 0 Millimeter
Basic static load rating C_0	3450 kN
Basic static load rating - C_0	3450 kN