


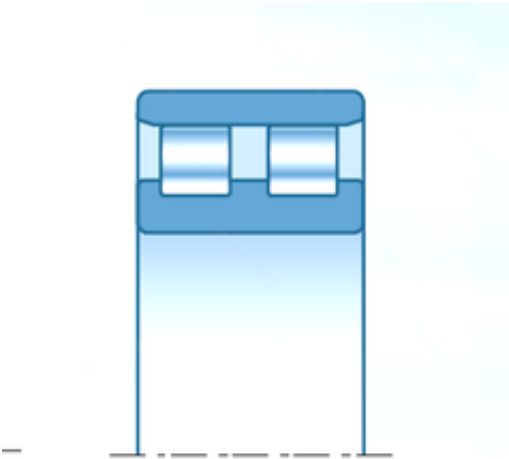

Bearing No. NN3008KC1NAP4

D	68 mm
d	40 mm
B	21 mm
C	21 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Width	0.827 Inch 21 Millimeter
UNSPSC	31171547
series:	NN30K
Profile	Complete with Outer and Inner Ring
Category	Cylindrical Roller Bearing
Retainer	Yes
flanges:	(3) Inner Ring
Snap Ring	No
Separable	Outer Ring - Both Sides
Size (mm)	40x68x21
Inventory	0.0
bore type:	Tapered 1:12
Width (mm)	21
maximum rpm:	11000 rpm
Weight / LBS	0.659
Bore Profile	Tapered
Cage Material	Brass
Product Group	B04270
closure type:	Open
Inch - Metric	Metric
cage material:	High Strength, 2 piece, Machined Brass

overall width:	21 mm
bore diameter:	40 mm
fillet radius:	1 mm
Bearing number	NN3008KC1NAP4
Other Features	3 Rib Inner Ring Plain Outer Ring Precision Bearing Cage on Inner Ring OD
Relubricatable	Yes
finish/coating:	Uncoated
Precision Class	ABEC 7 ISO P4
number of rows:	2
Rolling Element	Cylindrical Roller Bearing
Long Description	40MM Bore; Tapered Bore Profile; 68MM Outside Diameter; 21MM Width; Brass Cage Material; ABEC 7 ISO P4; Double Row; Outer Ring - Both Sides Separable; No Snap Ring; Relubricatable; C1NA Internal CI
Outside Diameter	2.677 Inch 68 Millimeter
Manufacturer URL	http://www.ntnamerica.com
outer ring width:	21 mm
Manufacturer Name	NTN
Weight / Kilogram	0.298
precision rating:	ISO Class 4
bearing material:	Hardened Alloy Steel
outside diameter:	68 mm
Internal Clearance	C1NA
Bore Diameter (mm)	40
internal clearance:	C1NA

Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
resistance features:	Clean Room, Vacuum
static load capacity:	55500 N
dynamic load capacity:	43500 N
Harmonized Tariff Code	8482.50.00.00
Manufacturer Item Number	NN3008KC1NAP4
Number of Rows of Rollers	Double Row
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C