


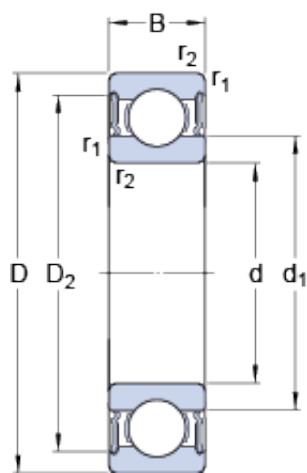

Bearing No. 6306-2RS1

D	72 mm
d	30 mm
B	19 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
UNSPSC	31171504
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Size (mm)	72x30x19
Snap Ring	No
Width (mm)	19
Mass bearing	0.36 kg
Weight / LBS	0.82
Inch - Metric	Metric
Cage Material	Steel
D ₂	61.88 mm
d ₁	44.6 mm
Product Group	B00308
Enclosure Type	Contact Seal
Keyword String	Ball
Bearing number	6306-2RS1
Limiting speed	6300 r/min
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.skf.com
Long Description	30MM Bore; 72MM Outside Diameter; 19MM Outer Race Diameter; 2 Seals; Ball

	Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.835 Inch 72 Millimeter
Outer Race Width	0.748 Inch 19 Millimeter
Weight / Kilogram	0.365
Manufacturer Name	SKF
Internal Clearance	C0-Medium
Bore Diameter (mm)	72
d _a max.	44.5 mm
D _a max.	65 mm
d _a min.	37 mm
r _a max.	1 mm
Outer Diameter (mm)	30
D _a - max.	65 mm
d _a - max.	44.5 mm
d _a - min.	37 mm
r _{1,2} min.	1.1 mm
Minimum Buy Quantity	N/A
r _a - max.	1 mm
D ₂ ?	61.88 mm
d ₁ ?	44.6 mm
r _{1,2} - min.	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6306-2RS1
Internal Special Features	No
Basic dynamic load rating C	29.6 kN
Basic dynamic load rating - C	29.6 kN

Maximum Capacity / Filling Slot	No
Fatigue load limit P_u	0.67 kN
Calculation factor k_r	0.03
Calculation factor f_0	13.1
Fatigue load limit - P_u	0.67 kN
Calculation factor - k_r	0.03
Calculation factor - f_0	13.1
Basic static load rating C_0	16 kN
Basic static load rating - C_0	16 kN