


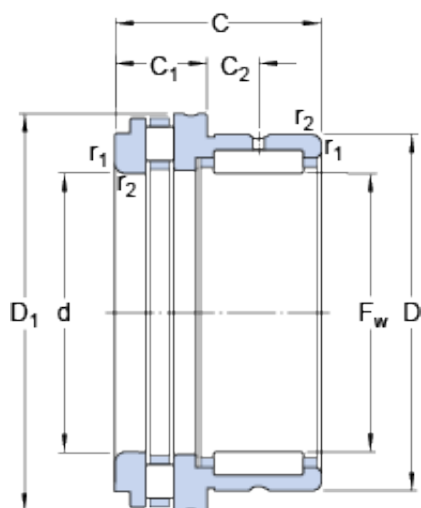

Bearing No. NKXR 40

d	40 mm
F	40 mm
D	52 mm
C	32 mm
Category	Roller Bearings
Inventory	0.0
Size (mm)	52x40x32
Inner ring	IR 35x40x20
Width (mm)	32
Mass bearing	0.204 kg
C ₂	10 mm
C ₁	13 mm
D ₁	60.1 mm
C ₂	10 mm
C ₁	13 mm
F _w	40 mm
d _i	35 mm
F _w	40 mm
B _i	20 mm
Product Group	B04144
d _i	35 mm
B _i	20 mm
D ₁	60.1 mm
Bearing number	NKXR 40
Limiting speed	5000 r/min
Reference speed	2400 r/min
Manufacturer Name	SKF
Weight / Kilogram	0.228
Bore Diameter (mm)	52

r_b max.	0.3 mm
r_a max.	0.6 mm
d_a min.	55.7 mm
Outer Diameter (mm)	40
d_a - min.	55.7 mm
$r_{1,2}$ min.	0.6 mm
r_a - max.	0.6 mm
Minimum Buy Quantity	N/A
r_b - max.	0.3 mm
$r_{1,2}$ - min.	0.6 mm
Minimum axial load factor A	0.0015
Basic dynamic load rating, axial direction C	43 kN
Basic dynamic load rating, radial direction C	26.4 kN
Basic dynamic load rating, axial direction - C	43 kN
Basic dynamic load rating, radial direction - C	26.4 kN
Fatigue load limit, axial direction P_u	13.7 kN
Fatigue load limit, radial direction P_u	6.3 kN
Fatigue load limit, axial direction - P_u	13.7 kN
Fatigue load limit, radial direction - P_u	6.3 kN
Basic static load rating, axial direction C_0	137 kN
Basic static load rating, radial direction C_0	51 kN
Basic static load rating, axial direction - C_0	137 kN
Basic static load rating,	51 kN

radial direction - C ₀	
-----------------------------------	--