


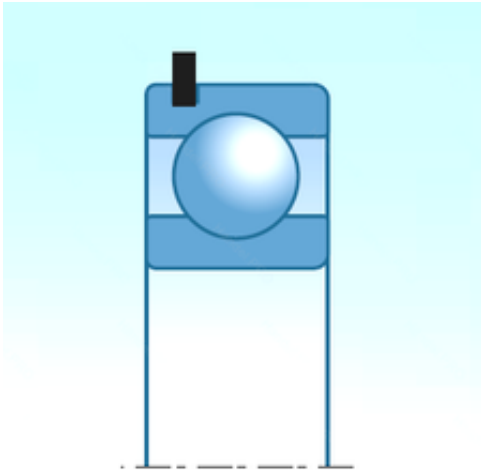

Bearing No. 6306LLBNR

|                      |                          |
|----------------------|--------------------------|
| D                    | 72,000 mm                |
| d                    | 30,000 mm                |
| B                    | 19,000 mm                |
| C                    | 19,000 mm                |
| Category             | Bearings                 |
| Inventory            | 0.0                      |
| Size (mm)            | 30x72x19                 |
| bore type:           | Round                    |
| Width (mm)           | 19,000                   |
| closure type:        | Double Sealed            |
| Product Group        | B00308                   |
| bore diameter:       | 30 mm                    |
| Bearing number       | 6306LLBNR                |
| cage material:       | Steel                    |
| fillet radius:       | 1.1 mm                   |
| overall width:       | 19 mm                    |
| finish/coating:      | Uncoated                 |
| inner ring width:    | 19 mm                    |
| bearing material:    | High Carbon Chrome Steel |
| outer ring width:    | 19 mm                    |
| outside diameter:    | 72 mm                    |
| precision rating:    | ISO Class 0              |
| Weight / Kilogram    | 0                        |
| Manufacturer Name    | NTN                      |
| Bore Diameter (mm)   | 30,000                   |
| snap ring included:  | With Snap Ring           |
| Outer Diameter (mm)  | 72,000                   |
| internal clearance:  | CN                       |
| Minimum Buy Quantity | N/A                      |
|                      |                          |

|                              |                            |
|------------------------------|----------------------------|
| static load capacity:        | 15000 N                    |
| row type & fill slot:        | Single Row Non-Fill Slot   |
| maximum rpm (grease):        | 10000 rpm                  |
| dynamic load capacity:       | 26700 N                    |
| manufacturer product page:   | <a href="#">Click here</a> |
| operating temperature range: | -40 to 120 °C              |