


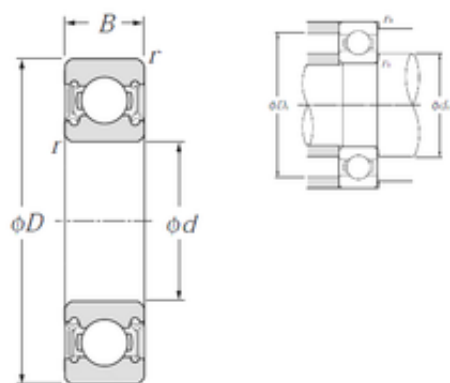

Bearing No. 6306LLU

C	19 mm
d	30 mm
D	72 mm
B	19 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Weight	0,36 Kg
r min.	1,1 mm
da max	43 mm
UNSPSC	31171504
da min.	36,5 mm
Da max.	65,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	30x72x19
Snap Ring	No
Inventory	10.0
Enclosure	2 Seals
Width (mm)	19
bore type:	Round
Weight / LBS	0.769
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	30 mm
Keyword String	Ball
overall width:	19 mm
cage material:	Steel

fillet radius:	1.1 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C
Bearing number	6306LLU
Enclosure Type	Contact Seal
Reference speed	6 600 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outside Diameter	2.835 Inch 72 Millimeter
Long Description	30MM Bore; 72MM Outside Diameter; 19MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.748 Inch 19 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer Name	NTN
outside diameter:	72 mm
Weight / Kilogram	0.349
precision rating:	ISO Class 0
inner ring width:	19 mm
outer ring width:	19 mm
bearing material:	High Carbon Chrome Steel
Bore Diameter (mm)	30

Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	72
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	15000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	6600 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	26700 N
Manufacturer Item Number	6306LLU
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	15 kN
Basic dynamic load rating (C)	26,7 kN
Maximum Capacity / Filling Slot	No