


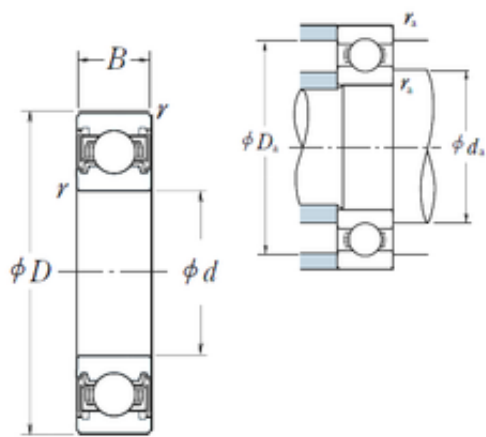

Bearing No. 6306VV

D	72 mm
d	30 mm
B	19 mm
C	19 mm
r	1.1
Z_	8
B_	19
D_	72
ra	1
C0	15
fo	13.3
DI_	40.094
SRI	6.01
D_a	65.5
DE_	63.906
DA_	11.906
SRE	6.25
SRIN	0
SBRG	3
yobi	6306VV
SDM_	52
SREX	0.05
KBRG	6151
bomp	0
mass	0.345
Bore	1.181 Inch 30 Millimeter
SRIX	0.025
SREN	0
Noun	Bearing

ALPHA_	0
da min	36.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	42,5 mm
C_conv	26700
Weight	0,345 Kg
ra max.	1 mm
hidYobi	6306VV
GRS rpm	9500
da min.	36,5 mm
Da max.	65,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	30x72x19
Enclosure	2 Seals
Inventory	0.0
Width (mm)	19
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.345
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6306VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.748 Inch 19 Millimeter
Outside Diameter	2.835 Inch 72

	Millimeter
Long Description	30MM Bore; 72MM Outside Diameter; 19MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.36
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6306VV
Internal Special Features	No
(Grease) Lubrication Speed	9 500 r/min
Basic static load rating (C0)	15 kN
Basic dynamic load rating (C)	26,7 kN
Maximum Capacity / Filling Slot	No