


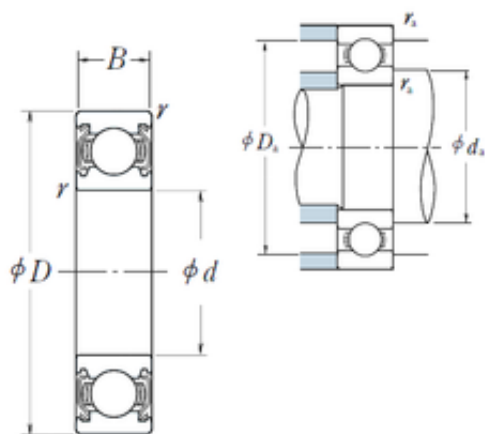

Bearing No. 6306ZZ

r	1.1
d	30 mm
D	72 mm
B	19 mm
C	19 mm
fo	13.3
D_	72
B_	19
ra	1
Z_	8
C0	15
DI_	40.094
SRE	6.25
D_a	65.5
DE_	63.906
SRI	6.01
DA_	11.906
SREN	0
Noun	Bearing
SRIN	0
bomp	0
SRIX	0.025
yobi	6306ZZ
mass	0.345
SDM_	52
KBRG	6141
SREX	0.05
SBRG	3
Bore	1.181 Inch 30 Millimeter

LangID	1
da min	36.5
r min.	1,1 mm
UNSPSC	31171504
ALPHA_	0
Weight	0,345 Kg
C_conv	26700
da max	42,5 mm
Da max.	65,5 mm
GRS rpm	9500
hidYobi	6306ZZ
ra max.	1 mm
da min.	36,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	30x72x19
Snap Ring	No
Inventory	0.0
Enclosure	2 Metal Shields
Prod_Type3	DGBB_SR_ZZ
bore type:	Round
Width (mm)	19
Weight / LBS	0.342
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
Cage Material	Steel
Bearing number	6306ZZ
cage material:	Steel Cage
Keyword String	Ball
bore diameter:	30 mm
overall width:	19 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Long Description	30MM Bore; 72MM Outside Diameter; 19MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	2.835 Inch 72 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.748 Inch 19 Millimeter
outside diameter:	72 mm
Weight / Kilogram	0.349
Manufacturer Name	NSK
precision rating:	ABEC1, P0
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
internal clearance:	C0
snap ring included:	Without Snap Ring
Outer Diameter (mm)	72
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	26700 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6306ZZ
Internal Special Features	No
(Grease) Lubrication	9 500 r/min

Speed	
Basic dynamic load rating (C)	26,7 kN
Basic static load rating (C0)	15 kN
Maximum Capacity / Filling Slot	No