


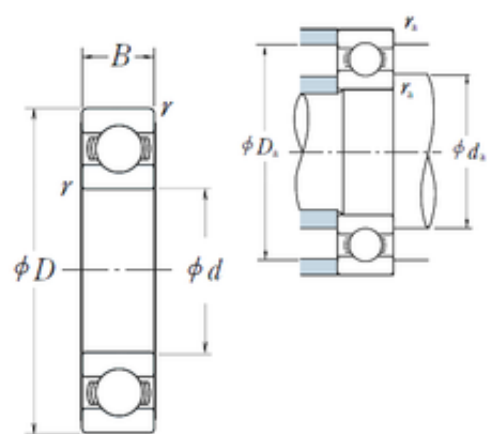

Bearing No. 6992

r	4
d	460 mm
D	620 mm
B	74 mm
C	74 mm
C0	720
Z_	19
ra	3
B_	74
D_	620
fo	16.7
D_a	604
SRE	24.65
DE_	587.625
DA_	47.625
DI_	492.375
SRI	24.65
mass	62.6
SRIN	-0.08
SBRG	19
SRIX	0.08
KBRG	6104
SREN	-0.08
yobi	6992
bomp	0
SREX	0.08
SDM_	540
r min.	4 mm
ALPHA_	0
da min	476

C_conv	405000
Weight	62,6 Kg
LangID	1
Oil rpm	950
GRS rpm	800
hidYobi	6992
ra max.	3 mm
Da max.	591 mm
da min.	496 mm
hidTable	ecat_NSRDGB
Size (mm)	460x620x74
Prod_Type3	DGBB_SR_OT
Width (mm)	74
Bearing number	6992
Bore Diameter (mm)	460
Outer Diameter (mm)	620
Basic static load rating (C0)	720 kN
Basic dynamic load rating (C)	405 kN