


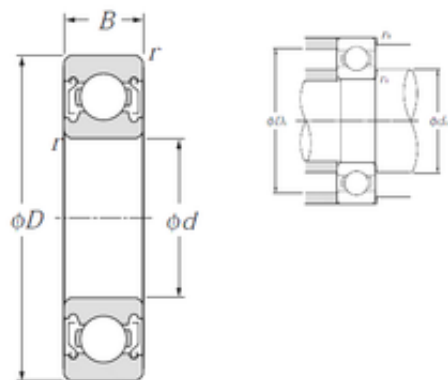

Bearing No. 6306ZZ

D	72 mm
d	30 mm
B	19 mm
C	19 mm
rn	0,5 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Weight	0,36 Kg
r min.	1,1 mm
UNSPSC	31171504
da max	43 mm
da min.	36,5 mm
Da max.	65,5 mm
ra max.	1 mm
series:	63
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	30x72x19
Inventory	0.0
Snap Ring	No
Width (mm)	19
bore type:	Round
maximum rpm:	6600 RPM
Weight / LBS	0.771
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
bore diameter:	30 mm

Keyword String	Ball
overall width:	19 mm
cage material:	Steel
fillet radius:	1.1 mm
Bearing number	6306ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	30MM Bore; 72MM Outside Diameter; 19MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.835 Inch 72 Millimeter
Outer Race Width	0.748 Inch 19 Millimeter
outside diameter:	72 mm
outer ring width:	19 mm
inner ring width:	19 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.349
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	30
Outer Diameter (mm)	72
internal clearance:	CN
snap ring included:	Without Snap Ring

Minimum Buy Quantity	N/A
maximum rpm (grease):	10000 rpm
static load capacity:	15000 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	26700 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6306ZZ/4M
Internal Special Features	No
(Grease) Lubrication Speed	10 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	26,7 kN
Basic static load rating (C0)	15 kN
Maximum Capacity / Filling Slot	No