


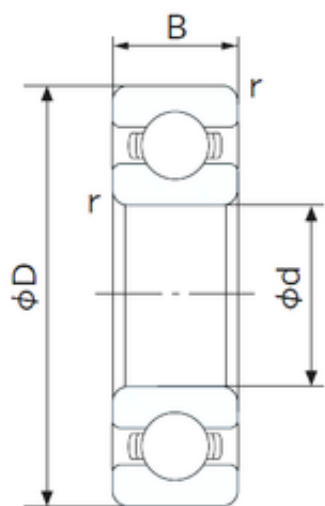

Bearing No. 6308

C	23 mm
d	40 mm
D	90 mm
B	23 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
Width	23 mm
Weight	0.633 Kg
r min.	1.5 mm
UNSPSC	31171504
da min.	49 mm
Da max.	81 mm
ra max.	1.5 mm
da (min)	49 mm
Da (max)	81 mm
Category	Single Row Ball Bearing
ra (max)	1.5 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	13.2
Inventory	0.0
Bore Size	40 mm
Size (mm)	40x90x23
Snap Ring	No
Width (mm)	23
Weight / LBS	1.411
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6308
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Radial Clearance	0.006 to 0.020 mm
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
Outer Race Width	0.906 Inch 23 Millimeter
Manufacturer URL	http://www.nachi-america.com
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer Name	NACHI
Weight / Kilogram	0
Static Load Rating	24,100 N
Bore Diameter (mm)	40
Internal Clearance	C0-Medium
Outer Diameter (mm)	90
Dynamic Load Rating	40,500 N
Minimum Buy Quantity	N/A
Limiting Speed - Oil	9,200 rpm
Fillet Radius/Chamfer	1.5 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	7,800 rpm

Internal Special Features	No
(Grease) Lubrication Speed	7500 r/min
Basic static load rating (C0)	24,1 kN
Basic dynamic load rating (C)	40,5 kN
Maximum Capacity / Filling Slot	No