


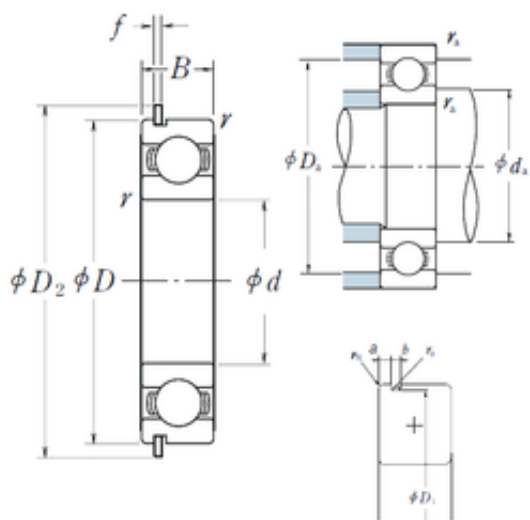

Bearing No. 6308NR

b	2,7 mm
r	1.5
d	40 mm
D	90 mm
B	23 mm
C	23 mm
a	3,28 mm
f	2,46 mm
Dx	98
ra	1.5
Cy	5.4
D2	96,5 mm
D1	86,79 mm
Z_	8
B_	23
fo	13.2
rn	0,5 mm
D_	90
ro	0.6
C0	24
SRE	7.99
D_a	82
DI_	49.919
DE_	80.081
DA_	15.081
SRI	7.62
SREN	0
SRIN	0
SRIX	0.03
bomp	0

mass	0.636
Noun	Bearing
yobi	6308NR
SDM_	65
SREX	0.065
KBRG	6101
SBRG	3
Bore	1.575 Inch 40 Millimeter
da min	48
da max	53 mm
LangID	1
Weight	0,636 Kg
UNSPSC	31171504
r min.	1,5 mm
ALPHA_	0
C_conv	40500
Oil rpm	9000
hidYobi	6308NR
Da max.	82 mm
ra max.	1,5 mm
da min.	48 mm
GRS rpm	7500
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Enclosure	Open
Snap Ring	Yes
Inventory	0.0
Size (mm)	40x90x23
bore type:	Round
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	23

Weight / LBS	1.455
closure type:	Open
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6308NR
bore diameter:	40 mm
overall width:	23 mm
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.906 Inch 23 Millimeter
Outside Diameter	3.543 Inch 90 Millimeter
bearing material:	Steel
outside diameter:	90 mm
Weight / Kilogram	0.66
Manufacturer Name	NSK
maximum rpm (oil):	11000 rpm
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	90
internal clearance:	C0
snap ring included:	With Snap Ring

Minimum Buy Quantity	N/A
static load capacity:	5400 lbs
maximum rpm (grease):	9000 rpm
row type & fill slot:	Single Row Non-Fill Slot
manufacturer catalog:	Click here
dynamic load capacity:	9600 lbs
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	9 000 r/min
manufacturer upc number:	029176016882
Internal Special Features	No
(Grease) Lubrication Speed	7 500 r/min
Basic dynamic load rating (C)	40,5 kN
Basic static load rating (C0)	24 kN
Maximum Capacity / Filling Slot	No