


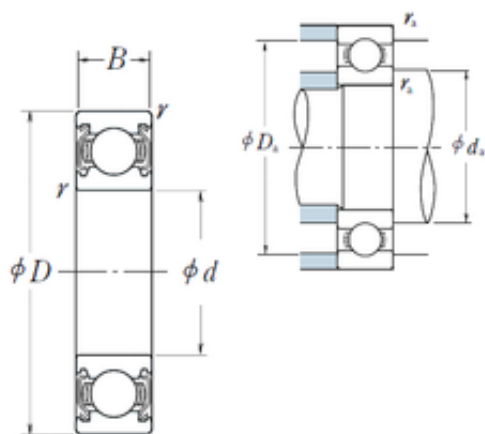

Bearing No. 6308ZZ

D	90 mm
d	40 mm
B	23 mm
C	23 mm
r	1.5
C0	24
fo	13.2
D_	90
ra	1.5
B_	23
Z_	8
DI_	49.919
D_a	82
DE_	80.081
SRI	7.62
DA_	15.081
SRE	7.99
SRIN	0
Bore	1.575 Inch 40 Millimeter
SDM_	65
Noun	Bearing
yobi	6308ZZ
SBRG	3
mass	0.636
bomp	0
SREX	0.065
KBRG	6141
SRIX	0.03
SREN	0

UNSPSC	31171504
ALPHA_	0
LangID	1
r min.	1,5 mm
da min	48
Weight	0,636 Kg
C_conv	40500
da max	53 mm
GRS rpm	7500
hidYobi	6308ZZ
da min.	48 mm
Da max.	82 mm
ra max.	1,5 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Snap Ring	No
Enclosure	2 Metal Shields
Size (mm)	40x90x23
bore type:	Round
Prod_Type3	DGBB_SR_ZZ
Width (mm)	23
Weight / LBS	0.633
Product Group	B00308
closure type:	Double Shielded
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6308ZZ
cage material:	Steel Cage
bore diameter:	40 mm
overall width:	23 mm
Keyword String	Ball

finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.906 Inch 23 Millimeter
Long Description	40MM Bore; 90MM Outside Diameter; 23MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	3.543 Inch 90 Millimeter
Weight / Kilogram	0.63
Manufacturer Name	NSK
precision rating:	ABEC1, P0
outside diameter:	90 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
internal clearance:	C0
Outer Diameter (mm)	90
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	40500 N
Manufacturer Item Number	6308ZZ
Internal Special Features	No
(Grease) Lubrication	7 500 r/min

Speed	
Basic static load rating (C0)	24 kN
Basic dynamic load rating (C)	40,5 kN
Maximum Capacity / Filling Slot	No