


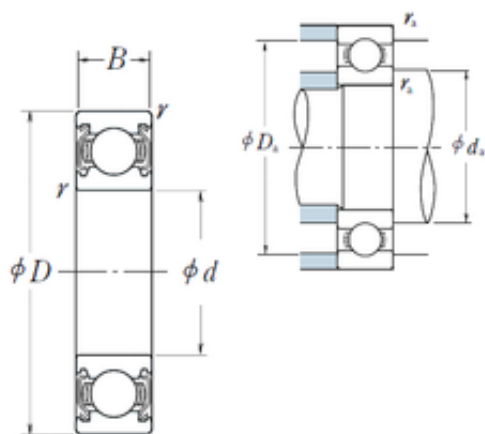

Bearing No. 6922ZZ

D	150 mm
d	110 mm
B	20 mm
C	20 mm
r	1.1
Z_	19
B_	20
D_	150
ra	1
C0	44.5
fo	16.6
DI_	118.094
SRI	6.16
D_a	143.5
DE_	141.906
DA_	11.906
SRE	6.16
SRIN	-0.025
SBRG	19
yobi	6922ZZ
SDM_	130
SREX	0.025
KBRG	6141
bomp	0
mass	0.893
Bore	4.331 Inch 110 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	116.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	121 mm
C_conv	43500
Weight	0,893 Kg
ra max.	1 mm
hidYobi	6922ZZ
GRS rpm	4300
Da max.	143,5 mm
da min.	116,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	110x150x20
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	20
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	1.9691
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6922ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	5.906 Inch 150

	Millimeter
Long Description	110MM Bore; 150MM Outside Diameter; 20MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; St
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.975
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	110
Outer Diameter (mm)	150
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
Basic static load rating (C0)	44,5 kN
Basic dynamic load rating (C)	43,5 kN
Maximum Capacity / Filling Slot	No