


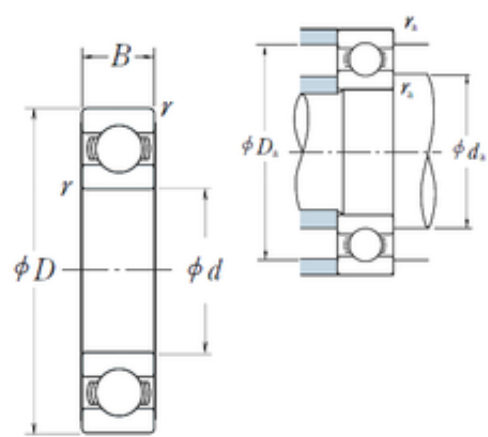

Bearing No. 6921

r	1.1
d	105 mm
D	145 mm
B	20 mm
C	20 mm
fo	16.5
C0	42
ra	1
B_	20
Z_	18
D_	145
SRI	6.16
DA_	11.906
SRE	6.16
DE_	136.906
DI_	113.094
D_a	138.5
Bore	4.134 Inch 105 Millimeter
SREN	-0.025
SRIN	-0.025
mass	0.856
bomp	0
Noun	Bearing
yobi	6921
SRIX	0.025
SDM_	125
SREX	0.025
KBRG	6101
SBRG	19

C_conv	42500
ALPHA_	0
Weight	0,856 Kg
da max	116 mm
r min.	1,1 mm
da min	111.5
UNSPSC	31171504
LangID	1
hidYobi	6921
GRS rpm	4300
Oil rpm	5300
Da max.	138,5 mm
ra max.	1 mm
da min.	111,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	105x145x20
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	20
Prod_Type3	DGBB_SR_OT
Weight / LBS	1.8875
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6921
Keyword String	Ball
Other Features	Deep Groove
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.787 Inch 20 Millimeter

Long Description	105MM Bore; 145MM Outside Diameter; 20MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	5.709 Inch 145 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	1.2
Internal Clearance	C0-Medium
Bore Diameter (mm)	105
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5 300 r/min
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
Basic static load rating (C0)	42 kN
Basic dynamic load rating (C)	42,5 kN
Maximum Capacity / Filling Slot	No