


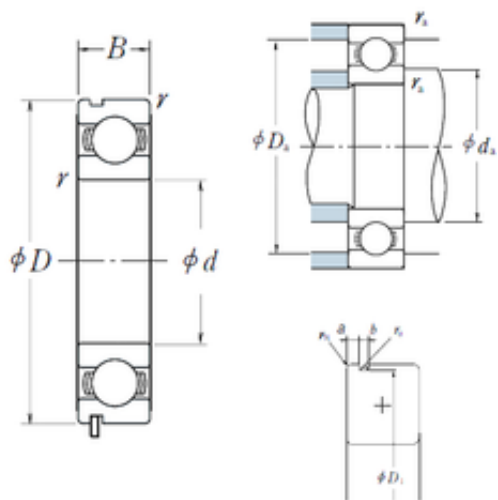

Bearing No. 6921N

a	3,3 mm
r	1.1
d	105 mm
D	145 mm
B	20 mm
C	20 mm
b	1,9 mm
fo	16.5
B_	20
ra	1
C0	42
D1	142,6 mm
D_	145
Z_	18
rn	0,5 mm
ro	0.6
DE_	136.906
SRI	6.16
D_a	138.5
DA_	11.906
SRE	6.16
DI_	113.094
yobi	6921N
mass	0.856
SBRG	19
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	125
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	42500
da max	116 mm
da min	111.5
Weight	0,856 Kg
LangID	1
ra max.	1 mm
Da max.	138,5 mm
Oil rpm	5300
da min.	111,5 mm
r0 max.	0,6 mm
hidYobi	6921N
GRS rpm	4300
hidTable	ecat_NSRDGB
Size (mm)	105x145x20
Prod_Type3	DGBB_SR_N_OT
Width (mm)	20
Bearing number	6921N
Bore Diameter (mm)	105
Outer Diameter (mm)	145
(Oil) Lubrication Speed	5 300 r/min
(Grease) Lubrication Speed	4 300 r/min
Basic dynamic load rating (C)	42,5 kN
Basic static load rating (C0)	42 kN