


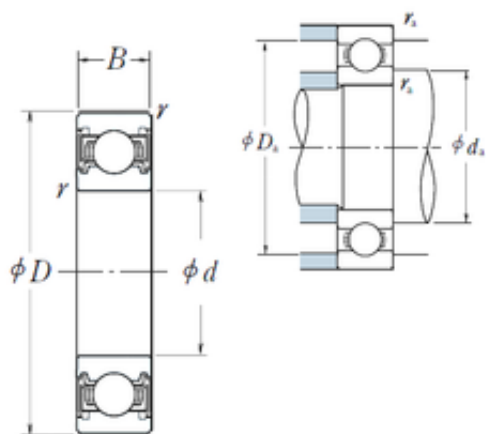

Bearing No. 6921VV

r	1.1
d	105 mm
D	145 mm
B	20 mm
C	20 mm
fo	16.5
D_	145
B_	20
ra	1
Z_	18
C0	42
DI_	113.094
SRE	6.16
D_a	138.5
DE_	136.906
SRI	6.16
DA_	11.906
SREN	-0.025
Bore	4.134 Inch 105 Millimeter
SRIN	-0.025
bomp	0
SRIX	0.025
yobi	6921VV
mass	0.856
SDM_	125
KBRG	6151
SREX	0.025
SBRG	19
Noun	Bearing

da max	116 mm
Weight	0,856 Kg
LangID	1
r min.	1,1 mm
da min	111.5
ALPHA_	0
C_conv	42500
UNSPSC	31171504
da min.	111,5 mm
hidYobi	6921VV
GRS rpm	4300
Da max.	138,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Enclosure	2 Seals
Size (mm)	105x145x20
Inventory	0.0
Prod_Type3	DGBB_SR_VV
Width (mm)	20
Weight / LBS	1.8875
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6921VV
Enclosure Type	Non-Contact Seal
Other Features	Deep Groove Rubber Seal
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outside Diameter	5.709 Inch 145

	Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Long Description	105MM Bore; 145MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.86
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	105
Outer Diameter (mm)	145
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
Basic dynamic load rating (C)	42,5 kN
Basic static load rating (C0)	42 kN
Maximum Capacity / Filling Slot	No