


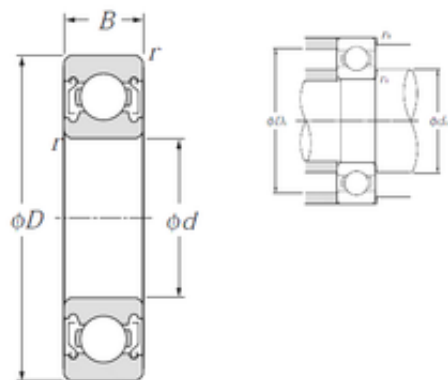

Bearing No. 6921ZZ

D	145 mm
C	20 mm
B	20 mm
d	105 mm
rn	0,5 mm
Bore	4.134 Inch 105 Millimeter
Noun	Bearing
r min.	1,1 mm
da max	115 mm
UNSPSC	31171504
Weight	0,816 Kg
da min.	111,5 mm
Da max.	138,5 mm
series:	69
ra max.	1 mm
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	105x145x20
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	20
Weight / LBS	1.844
maximum rpm:	5100 RPM
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Keyword String	Ball

Bearing number	6921ZZ
bore diameter:	105 mm
overall width:	20 mm
cage material:	Steel
fillet radius:	1.1 mm
standards met:	MIL-G-18709A
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.787 Inch 20 Millimeter
Outside Diameter	5.709 Inch 145 Millimeter
Long Description	105MM Bore; 145MM Outside Diameter; 20MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	20 mm
Manufacturer Name	NTN
Weight / Kilogram	0.84
outer ring width:	20 mm
outside diameter:	145 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	105
Outer Diameter (mm)	145
snap ring included:	Without Snap Ring

internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	42000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	4300 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	42500 N
Manufacturer Item Number	6921ZZ/2AS
Internal Special Features	No
(Grease) Lubrication Speed	4 300 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	42,5 kN
Basic static load rating (C0)	42 kN
Maximum Capacity / Filling Slot	No