


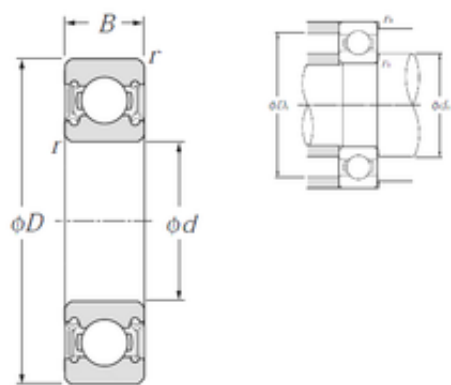

Bearing No. 6920LLU

D	140 mm
d	100 mm
B	20 mm
C	20 mm
Noun	Bearing
Bore	3.937 Inch 100 Millimeter
r min.	1,1 mm
da max	110 mm
Weight	0,785 Kg
UNSPSC	31171504
da min.	106,5 mm
series:	69
Da max.	133,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	100x140x20
Width (mm)	20
bore type:	Round
Weight / LBS	1.73
maximum rpm:	5300 RPM
Product Group	B00308
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
overall width:	20 mm
Keyword String	Ball

fillet radius:	1.1 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6920LLU
Enclosure Type	Contact Seal
bore diameter:	100 mm
cage material:	Steel
Reference speed	2 600 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outside Diameter	5.512 Inch 140 Millimeter
Outer Race Width	0.787 Inch 20 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	100MM Bore; 140MM Outside Diameter; 20MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.ntnamerica.com
Weight / US pound	1.755
outer ring width:	20 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	20 mm

precision rating:	ISO Class 0
outside diameter:	140 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
snap ring included:	Without Snap Ring
Outer Diameter (mm)	140
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	39500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2600 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	41000 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	41 kN
Basic static load rating (C0)	39,5 kN
Maximum Capacity / Filling Slot	No