


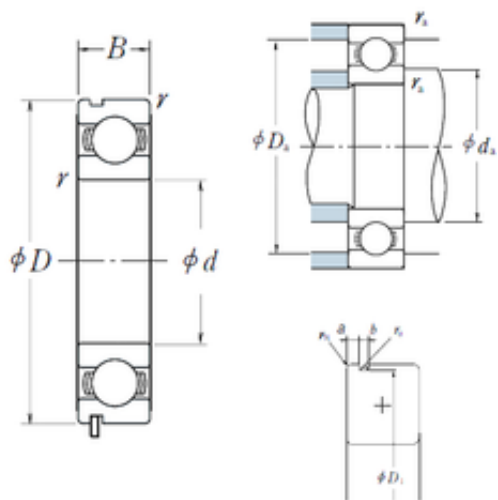

Bearing No. 6920N

a	3,3 mm
r	1.1
d	100 mm
D	140 mm
B	20 mm
C	20 mm
b	1,9 mm
fo	16.4
B_	20
ra	1
C0	42
D1	137,6 mm
D_	140
Z_	18
rn	0,5 mm
ro	0.6
DE_	131.906
SRI	6.16
D_a	133.5
DA_	11.906
SRE	6.16
DI_	108.094
yobi	6920N
mass	0.828
SBRG	19
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	120
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	43000
da max	111 mm
da min	106.5
Weight	0,828 Kg
LangID	1
ra max.	1 mm
Da max.	133,5 mm
Oil rpm	5300
da min.	106,5 mm
r0 max.	0,6 mm
hidYobi	6920N
GRS rpm	4500
hidTable	ecat_NSRDGB
Size (mm)	100x140x20
Prod_Type3	DGBB_SR_N_OT
Width (mm)	20
Bearing number	6920N
Bore Diameter (mm)	100
Outer Diameter (mm)	140
(Oil) Lubrication Speed	5 300 r/min
(Grease) Lubrication Speed	4 500 r/min
Basic dynamic load rating (C)	43 kN
Basic static load rating (C0)	42 kN