


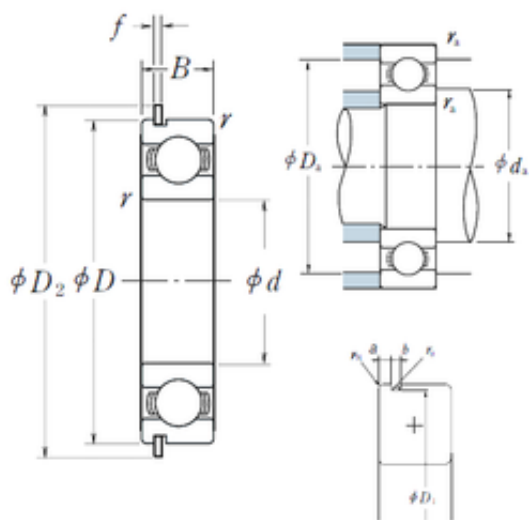

Bearing No. 6920NR

f	1,7 mm
r	1.1
d	100 mm
D	140 mm
B	20 mm
C	20 mm
a	3,3 mm
b	1,9 mm
D2	145,7 mm
B_	20
Cy	4.7
ra	1
C0	42
fo	16.4
D_	140
D1	137,6 mm
rn	0,5 mm
Z_	18
Dx	147
ro	0.6
DE_	131.906
DA_	11.906
SRI	6.16
D_a	133.5
SRE	6.16
DI_	108.094
SRIN	-0.025
yobi	6920NR
SBRG	19
bomp	0

SREX	0.025
KBRG	6101
SREN	-0.025
SDM_	120
SRIX	0.025
mass	0.828
C_conv	43000
r min.	1,1 mm
da max	111 mm
ALPHA_	0
Weight	0,828 Kg
da min	106.5
LangID	1
GRS rpm	4500
Da max.	133,5 mm
hidYobi	6920NR
Oil rpm	5300
da min.	106,5 mm
r0 max.	0,6 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	100x140x20
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	20
Bearing number	6920NR
Bore Diameter (mm)	100
Outer Diameter (mm)	140
(Oil) Lubrication Speed	5 300 r/min
(Grease) Lubrication Speed	4 500 r/min
Basic dynamic load rating (C)	43 kN
Basic static load rating	42 kN

(C0)	
------	--