


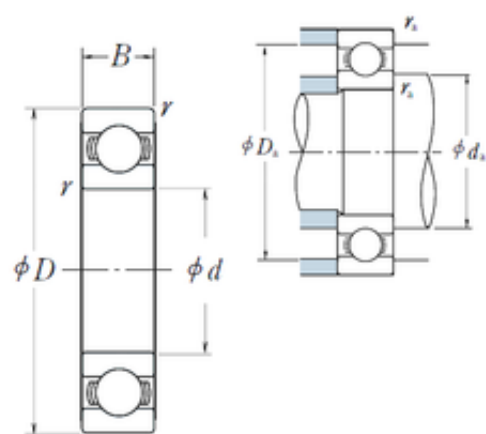

Bearing No. 6920

D	140 mm
d	100 mm
B	20 mm
C	20 mm
r	1.1
D_	140
fo	16.4
ra	1
B_	20
Z_	18
C0	42
DA_	11.906
DE_	131.906
SRI	6.16
DI_	108.094
SRE	6.16
D_a	133.5
SREN	-0.025
Noun	Bearing
Bore	3.937 Inch 100 Millimeter
SRIX	0.025
SRIN	-0.025
yobi	6920
bomp	0
SDM_	120
SBRG	19
KBRG	6101
mass	0.828
SREX	0.025

C_conv	43000
ALPHA_	0
Weight	0,828 Kg
da max	111 mm
UNSPSC	31171504
r min.	1,1 mm
da min	106.5
LangID	1
hidYobi	6920
Oil rpm	5300
GRS rpm	4500
Da max.	133,5 mm
da min.	106,5 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Size (mm)	100x140x20
Snap Ring	No
Enclosure	Open
Inventory	0.0
Width (mm)	20
Prod_Type3	DGBB_SR_OT
Weight / LBS	1.8257
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6920
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.787 Inch 20 Millimeter

Long Description	100MM Bore; 140MM Outside Diameter; 20MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Outside Diameter	5.512 Inch 140 Millimeter
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.82
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	100
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	5 300 r/min
Manufacturer Item Number	6920
Internal Special Features	No
(Grease) Lubrication Speed	4 500 r/min
Basic static load rating (C0)	42 kN
Basic dynamic load rating (C)	43 kN
Maximum Capacity / Filling Slot	No