


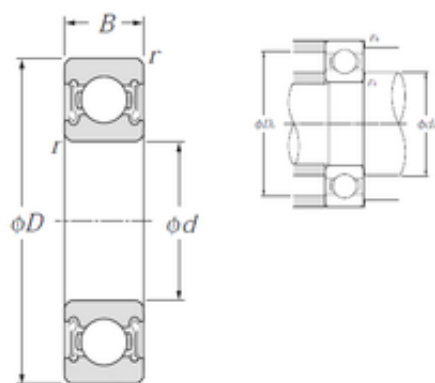

Bearing No. 6310LLB

D	110 mm
d	50 mm
B	27 mm
C	27 mm
Noun	Bearing
Bore	1.969 Inch 50 Millimeter
r min.	2 mm
da max	68,5 mm
UNSPSC	31171504
Weight	1,07 Kg
Da max.	101 mm
ra max.	2 mm
da min.	59 mm
series:	63
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	50x110x27
bore type:	Round
Width (mm)	27
Weight / LBS	2.35894
maximum rpm:	7500 RPM
closure type:	Double Sealed
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Keyword String	Ball
Other Features	Deep Groove Non-Friction Nitrile Rubber

	Seal
Enclosure Type	Non-Contact Seal
Bearing number	6310LLB
bore diameter:	50 mm
overall width:	27 mm
cage material:	Steel
fillet radius:	2 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outer Race Width	1.063 Inch 27 Millimeter
Outside Diameter	4.331 Inch 110 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	50MM Bore; 110MM Outside Diameter; 27MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Weight / Kilogram	1.08
outer ring width:	27 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	27 mm
outside diameter:	110 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium

Bore Diameter (mm)	50
Outer Diameter (mm)	110
internal clearance:	CN
snap ring included:	Without Snap Ring
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	6400 rpm
static load capacity:	38500 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	62000 N
Internal Special Features	No
(Grease) Lubrication Speed	6 400 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	38,5 kN
Basic dynamic load rating (C)	62 kN
Maximum Capacity / Filling Slot	No