


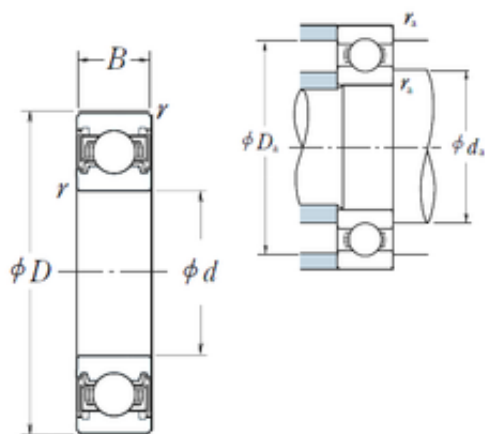

Bearing No. 6919VV

D	130 mm
d	95 mm
B	18 mm
C	18 mm
r	1.1
Z_	19
D_	130
B_	18
ra	1
C0	33.5
fo	16.6
DI_	102.181
SRI	5.34
SRE	5.34
D_a	123.5
DA_	10.319
DE_	122.819
Noun	Bearing
SREX	0.025
SREN	-0.025
SRIX	0.025
mass	0.601
Bore	3.74 Inch 95 Millimeter
bomp	0
KBRG	6151
SDM_	112.5
yobi	6919VV
SBRG	19
SRIN	-0.025
UNSPSC	31171504

da min	101.5
r min.	1,1 mm
LangID	1
da max	103,5 mm
ALPHA_	0
C_conv	33500
Weight	0,601 Kg
Da max.	123,5 mm
GRS rpm	4800
hidYobi	6919VV
series:	69
da min.	101,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	95x130x18
Enclosure	2 Seals
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	18
Prod_Type3	DGBB_SR_VV
maximum rpm:	4800 RPM
Weight / LBS	0.603
Cage Material	Steel
Product Group	B00308
closure type:	Double Sealed
Inch - Metric	Metric
Bearing number	6919VV
fillet radius:	1.1 mm
Enclosure Type	Non-Contact Seal
cage material:	Steel

overall width:	18 mm
Keyword String	Ball
bore diameter:	95 mm
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Outside Diameter	5.118 Inch 130 Millimeter
Long Description	95MM Bore; 130MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.709 Inch 18 Millimeter
Weight / Kilogram	0.69
outside diameter:	130 mm
precision rating:	ABEC 1 (ISO Class Normal)
outer ring width:	18 mm
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Outer Diameter (mm)	130
internal clearance:	C0
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	33500 N
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	33500 N
Manufacturer Item	6919VV

Number	
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
operating temperature range:	-10 to +110 °C
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	33,5 kN
Maximum Capacity / Filling Slot	No