


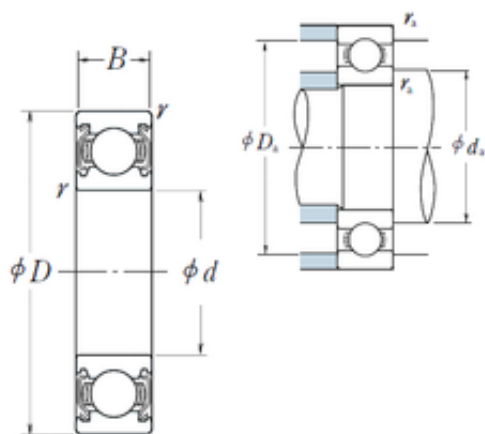

Bearing No. 6919ZZ

D	130 mm
d	95 mm
B	18 mm
C	18 mm
r	1.1
Z_	19
B_	18
D_	130
ra	1
C0	33.5
fo	16.6
DI_	102.181
SRI	5.34
D_a	123.5
DE_	122.819
DA_	10.319
SRE	5.34
SRIN	-0.025
SBRG	19
yobi	6919ZZ
SDM_	112.5
SREX	0.025
KBRG	6141
bomp	0
mass	0.601
Bore	3.74 Inch 95 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing
ALPHA_	0

da min	101.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	103,5 mm
C_conv	33500
Weight	0,601 Kg
ra max.	1 mm
hidYobi	6919ZZ
GRS rpm	4800
Da max.	123,5 mm
da min.	101,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	95x130x18
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	18
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	1.3252
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6919ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	95MM Bore; 130MM

	Outside Diameter; 18MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	5.118 Inch 130 Millimeter
Weight / Kilogram	0.696
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	4 800 r/min
Basic static load rating (C0)	33,5 kN
Basic dynamic load rating (C)	33,5 kN
Maximum Capacity / Filling Slot	No