


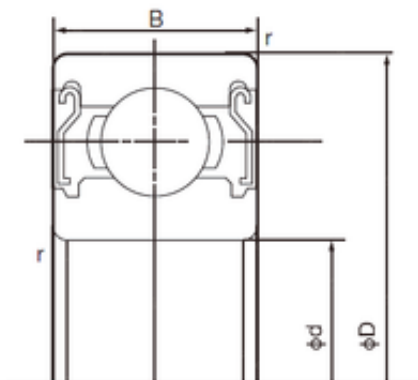

Bearing No. 6919ZZ

D	130 mm
d	95 mm
B	18 mm
C	18 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	18 mm
UNSPSC	31171504
r min.	1.1 mm
Weight	0.567 Kg
da min.	101 mm
Da max.	124 mm
ra max.	1.0 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
da (min)	101 mm
Da (max)	124 mm
Factor fo	16.5
Inventory	0.0
Bore Size	95 mm
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	95x130x18
Width (mm)	18
Weight / LBS	1.25
Configuration	Single Row
Product Group	B00308
Inch - Metric	Metric
Keyword String	Ball

Bearing number	6919ZZ
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	95MM Bore; 130MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nachi.com
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Radial Clearance	0.012 to 0.036 mm
Weight / Kilogram	0.568
Manufacturer Name	NACHI
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Static Load Rating	33,500 N
Dynamic Load Rating	33,500 N
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,800 rpm
Manufacturer Item Number	6919 ZZ BV2S
Internal Special Features	No
Basic static load rating (C0)	33,5 kN
Basic dynamic load	33,5 kN

rating (C)	
Maximum Capacity / Filling Slot	No