


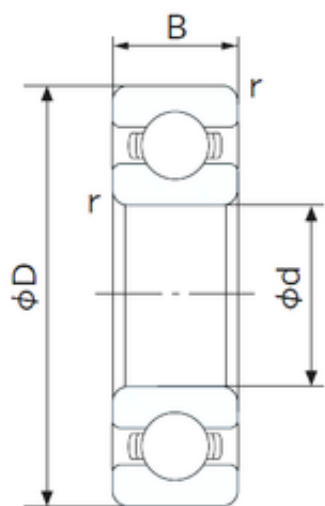

Bearing No. 6919

D	130 mm
d	95 mm
B	18 mm
C	18 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
Width	18 mm
UNSPSC	31171504
r min.	1.1 mm
Weight	0.567 Kg
Da max.	124 mm
da min.	101 mm
ra max.	1.0 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
da (min)	101 mm
Da (max)	124 mm
Bore Size	95 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	16.5
Size (mm)	95x130x18
Snap Ring	No
Inventory	0.0
Width (mm)	18
Weight / LBS	1.25
Product Group	B00308
Inch - Metric	Metric
Configuration	Single Row
Keyword String	Ball

Bearing number	6919
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	95MM Bore; 130MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.709 Inch 18 Millimeter
Radial Clearance	0.012 to 0.036 mm
Outside Diameter	5.118 Inch 130 Millimeter
Manufacturer URL	http://www.nachi.com
Weight / Kilogram	0.568
Manufacturer Name	NACHI
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
Static Load Rating	33,500 N
Dynamic Load Rating	33,500 N
Outer Diameter (mm)	130
Minimum Buy Quantity	N/A
Limiting Speed - Oil	5,700 rpm
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	4,800 rpm
Internal Special Features	No
(Grease) Lubrication Speed	4700 r/min
Basic dynamic load rating (C)	33,5 kN
Basic static load rating	33,5 kN

(C0)	
Maximum Capacity / Filling Slot	No