


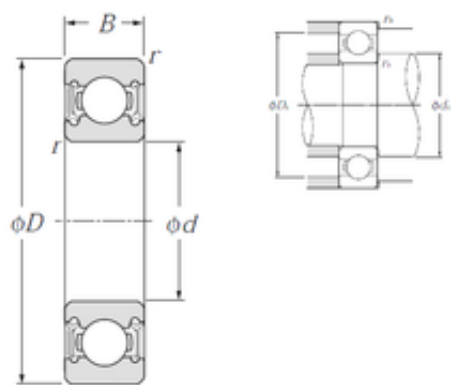

Bearing No. 6919LLU

D	130 mm
d	95 mm
B	18 mm
C	18 mm
Noun	Bearing
Bore	3.74 Inch 95 Millimeter
r min.	1,1 mm
da max	104 mm
Weight	0,579 Kg
UNSPSC	31171504
da min.	101,5 mm
series:	69
Da max.	123,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	95x130x18
Width (mm)	18
bore type:	Round
Weight / LBS	1.28
maximum rpm:	5700 RPM
Product Group	B00308
closure type:	Double Sealed
Inch - Metric	Metric
Cage Material	Steel
overall width:	18 mm
Keyword String	Ball
fillet radius:	1.1 mm

Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6919LLU
Enclosure Type	Contact Seal
bore diameter:	95 mm
cage material:	Steel
Reference speed	2 800 r/min
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Outside Diameter	5.118 Inch 130 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	95MM Bore; 130MM Outside Diameter; 18MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Weight / US pound	1.285
outer ring width:	18 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
inner ring width:	18 mm
precision rating:	ISO Class 0

outside diameter:	130 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	95
snap ring included:	Without Snap Ring
Outer Diameter (mm)	130
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	33500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2800 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	33500 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	33,5 kN
Basic static load rating (C0)	33,5 kN
Maximum Capacity / Filling Slot	No