


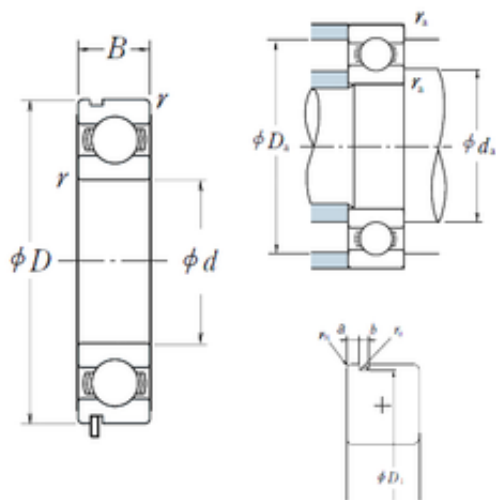

Bearing No. 6919N

a	3,3 mm
r	1.1
d	95 mm
D	130 mm
B	18 mm
C	18 mm
b	1,3 mm
fo	16.6
B_	18
ra	1
C0	33.5
D1	127,6 mm
D_	130
Z_	19
rn	0,5 mm
ro	0.4
DE_	122.819
SRI	5.34
D_a	123.5
DA_	10.319
SRE	5.34
DI_	102.181
yobi	6919N
mass	0.601
SBRG	19
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	112.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	33500
da max	103,5 mm
da min	101.5
Weight	0,601 Kg
LangID	1
ra max.	1 mm
Da max.	123,5 mm
Oil rpm	5600
da min.	101,5 mm
r0 max.	0,4 mm
hidYobi	6919N
GRS rpm	4800
hidTable	ecat_NSRDGB
Size (mm)	95x130x18
Prod_Type3	DGBB_SR_N_OT
Width (mm)	18
Bearing number	6919N
Bore Diameter (mm)	95
Outer Diameter (mm)	130
(Oil) Lubrication Speed	5 600 r/min
(Grease) Lubrication Speed	4 800 r/min
Basic dynamic load rating (C)	33,5 kN
Basic static load rating (C0)	33,5 kN