


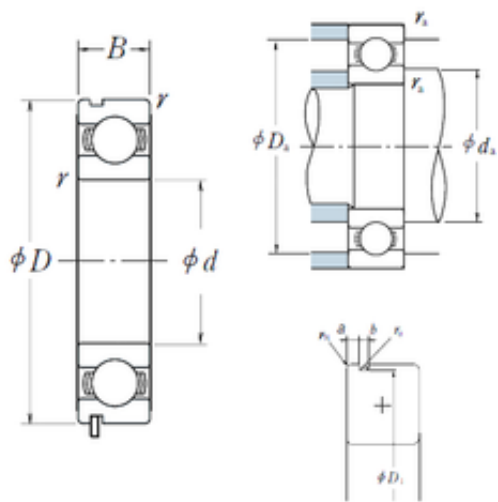

Bearing No. 6918N

a	3,3 mm
r	1.1
d	90 mm
D	125 mm
B	18 mm
C	18 mm
b	1,3 mm
fo	16.5
B_	18
ra	1
C0	31.5
D1	122,6 mm
D_	125
Z_	18
rn	0,5 mm
ro	0.4
DE_	117.819
SRI	5.34
D_a	118.5
DA_	10.319
SRE	5.34
DI_	97.181
yobi	6918N
mass	0.585
SBRG	19
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	107.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	33000
da max	98,5 mm
da min	96.5
Weight	0,585 Kg
LangID	1
ra max.	1 mm
Da max.	118,5 mm
Oil rpm	6000
da min.	96,5 mm
r0 max.	0,4 mm
hidYobi	6918N
GRS rpm	5000
hidTable	ecat_NSRDGB
Size (mm)	90x125x18
Prod_Type3	DGBB_SR_N_OT
Width (mm)	18
Bearing number	6918N
Bore Diameter (mm)	90
Outer Diameter (mm)	125
(Oil) Lubrication Speed	6 000 r/min
(Grease) Lubrication Speed	5 000 r/min
Basic dynamic load rating (C)	33 kN
Basic static load rating (C0)	31,5 kN