


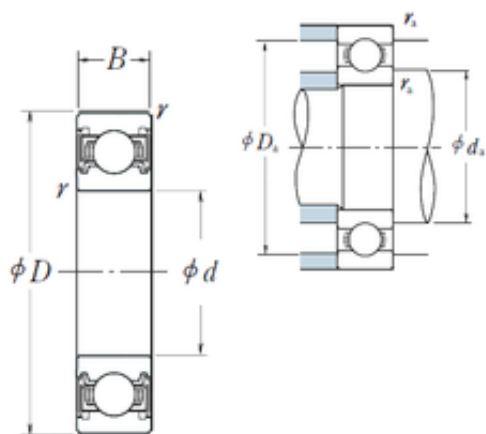

Bearing No. 6918VV

r	1.1
d	90 mm
D	125 mm
B	18 mm
C	18 mm
fo	16.5
D_	125
B_	18
ra	1
Z_	18
C0	31.5
DI_	97.181
SRE	5.34
D_a	118.5
DE_	117.819
SRI	5.34
DA_	10.319
SREN	-0.025
Bore	3.543 Inch 90 Millimeter
SRIN	-0.025
bomp	0
SRIX	0.025
yobi	6918VV
mass	0.585
SDM_	107.5
KBRG	6151
SREX	0.025
SBRG	19
Noun	Bearing

Weight	0,585 Kg
r min.	1,1 mm
da min	96.5
ALPHA_	0
UNSPSC	31171504
C_conv	33000
LangID	1
da max	98,5 mm
hidYobi	6918VV
da min.	96,5 mm
GRS rpm	5000
Da max.	118,5 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Snap Ring	No
Size (mm)	90x125x18
Prod_Type3	DGBB_SR_VV
Width (mm)	18
Weight / LBS	3.543
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6918VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	90MM Bore; 125MM

	Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	4.921 Inch 125 Millimeter
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.565
Manufacturer Name	NSK
Bore Diameter (mm)	90
Internal Clearance	C0-Medium
Outer Diameter (mm)	125
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	5 000 r/min
Basic dynamic load rating (C)	33 kN
Basic static load rating (C0)	31,5 kN
Maximum Capacity / Filling Slot	No