


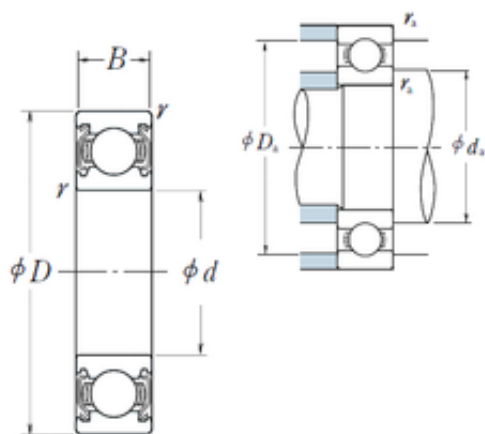

Bearing No. 6916ZZ

D	110 mm
d	80 mm
B	16 mm
C	16 mm
r	1
Z_	19
B_	16
D_	110
ra	1
C0	24
fo	16.6
DI_	86.269
SRI	4.52
D_a	105
DE_	103.731
DA_	8.731
SRE	4.52
SRIN	-0.02
SBRG	19
yobi	6916ZZ
SDM_	95
SREX	0.02
KBRG	6141
bomp	0
mass	0.391
SRIX	0.02
Bore	3.15 Inch 80 Millimeter
SREN	-0.02
Noun	Bearing
ALPHA_	0

da min	85
LangID	1
r min.	1 mm
UNSPSC	31171504
da max	87,5 mm
C_conv	25000
Weight	0,391 Kg
ra max.	1 mm
hidYobi	6916ZZ
GRS rpm	5600
Da max.	105 mm
da min.	85 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	80x110x16
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	16
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.8622
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6916ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	80MM Bore; 110MM Outside Diameter;

	16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	4.331 Inch 110 Millimeter
Weight / Kilogram	0.38
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	80
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	5 600 r/min
Basic static load rating (C0)	24 kN
Basic dynamic load rating (C)	25 kN
Maximum Capacity / Filling Slot	No