


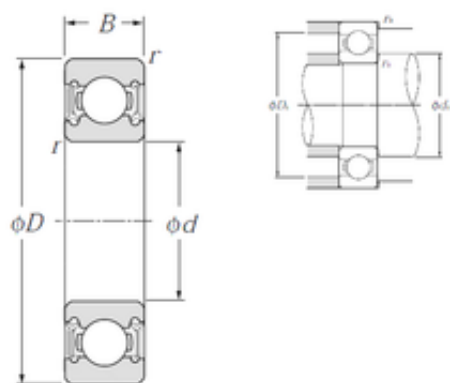

Bearing No. 6916LLU

C	16 mm
d	80 mm
D	110 mm
B	16 mm
Bore	3.15 Inch 80 Millimeter
Noun	Bearing
Weight	0,373 Kg
r min.	1 mm
da max	88 mm
UNSPSC	31171504
da min.	85 mm
Da max.	105 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	80x110x16
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	16
bore type:	Round
Weight / LBS	0.822
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	80 mm
Keyword String	Ball
overall width:	16 mm
cage material:	Steel
fillet radius:	1 mm

Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6916LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	3 200 r/min
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	80MM Bore; 110MM Outside Diameter; 16MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	4.331 Inch 110 Millimeter
outside diameter:	110 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	16 mm
outer ring width:	16 mm
Weight / US pound	0.811
Bore Diameter (mm)	80
Internal Clearance	C0-Medium

Outer Diameter (mm)	110
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	24000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	3200 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	24900 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	24 kN
Basic dynamic load rating (C)	24,9 kN
Maximum Capacity / Filling Slot	No