


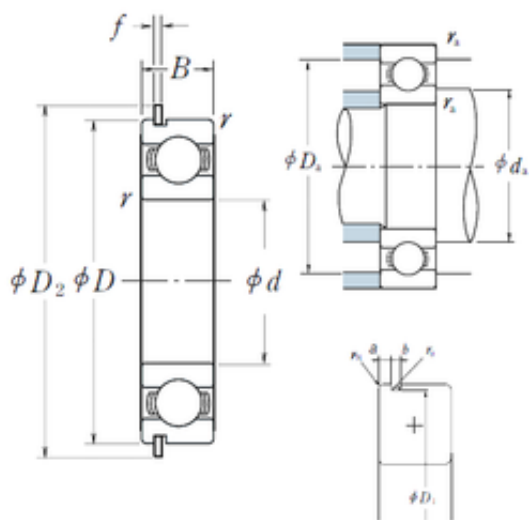

Bearing No. 6916NR

f	1,12 mm
r	1
d	80 mm
D	110 mm
B	16 mm
C	16 mm
a	2,5 mm
b	1,3 mm
D2	115,7 mm
B_	16
Cy	3.3
ra	1
C0	24
fo	16.6
D_	110
D1	107,6 mm
rn	0,5 mm
Z_	19
Dx	117
ro	0.4
DE_	103.731
DA_	8.731
SRI	4.52
D_a	105
SRE	4.52
DI_	86.269
SRIN	-0.02
yobi	6916NR
SBRG	19
bomp	0

SREX	0.02
KBRG	6101
SREN	-0.02
SDM_	95
SRIX	0.02
mass	0.391
C_conv	25000
r min.	1 mm
da max	87,5 mm
ALPHA_	0
Weight	0,391 Kg
da min	85
LangID	1
GRS rpm	5600
Da max.	105 mm
hidYobi	6916NR
Oil rpm	6700
da min.	85 mm
r0 max.	0,4 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	80x110x16
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	16
Bearing number	6916NR
Bore Diameter (mm)	80
Outer Diameter (mm)	110
(Oil) Lubrication Speed	6 700 r/min
(Grease) Lubrication Speed	5 600 r/min
Basic dynamic load rating (C)	25 kN
Basic static load rating	24 kN

(C0)	
------	--