


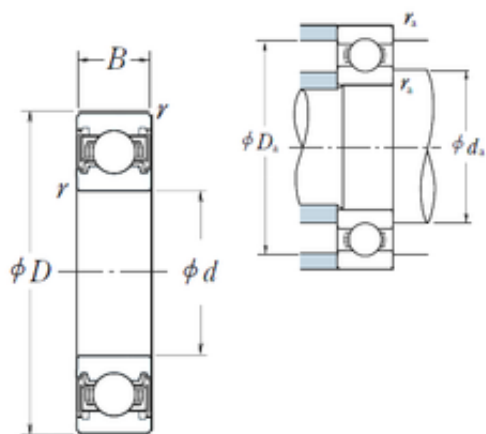

Bearing No. 6916VV

r	1
d	80 mm
D	110 mm
B	16 mm
C	16 mm
fo	16.6
D_	110
B_	16
ra	1
Z_	19
C0	24
DI_	86.269
SRE	4.52
D_a	105
DE_	103.731
SRI	4.52
DA_	8.731
SREN	-0.02
Bore	3.15 Inch 80 Millimeter
SRIN	-0.02
bomp	0
SRIX	0.02
yobi	6916VV
mass	0.391
SDM_	95
KBRG	6151
SREX	0.02
SBRG	19
Noun	Bearing
r min.	1 mm

da min	85
ALPHA_	0
UNSPSC	31171504
C_conv	25000
da max	87,5 mm
Weight	0,391 Kg
LangID	1
Da max.	105 mm
hidYobi	6916VV
da min.	85 mm
GRS rpm	5600
ra max.	1 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Enclosure	2 Seals
Inventory	0.0
Snap Ring	No
Size (mm)	80x110x16
Prod_Type3	DGBB_SR_VV
Width (mm)	16
Weight / LBS	3.15
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6916VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	80MM Bore; 110MM Outside Diameter; 16MM Outer Race

	Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	4.331 Inch 110 Millimeter
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.38
Manufacturer Name	NSK
Bore Diameter (mm)	80
Internal Clearance	C0-Medium
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	5 600 r/min
Basic dynamic load rating (C)	25 kN
Basic static load rating (C0)	24 kN
Maximum Capacity / Filling Slot	No