


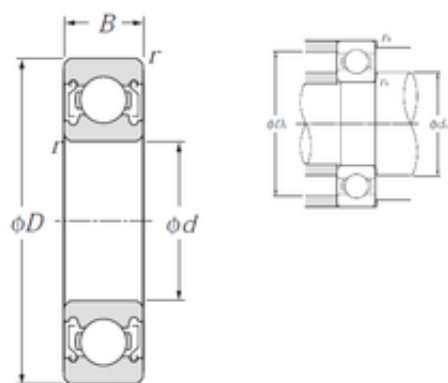

Bearing No. 6915ZZ

C	16 mm
d	75 mm
D	105 mm
B	16 mm
rn	0,5 mm
Noun	Bearing
Bore	2.953 Inch 75 Millimeter
Weight	0,353 Kg
da max	82,5 mm
UNSPSC	31171504
r min.	1 mm
da min.	80 mm
ra max.	1 mm
Da max.	100 mm
Category	Single Row Ball Bearing
Size (mm)	75x105x16
Enclosure	2 Metal Shields
Inventory	0.0
Snap Ring	No
bore type:	Round
Width (mm)	16
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Other Features	Deep Groove Shell Alvania Prelubricated
overall width:	16 mm
Bearing number	6915ZZ
cage material:	Steel

bore diameter:	75 mm
fillet radius:	1 mm
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outside Diameter	4.134 Inch 105 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	75MM Bore; 105MM Outside Diameter; 16MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0
outside diameter:	105 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
inner ring width:	16 mm
outer ring width:	16 mm
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
internal clearance:	CN
snap ring included:	Without Snap Ring
Outer Diameter (mm)	105
Minimum Buy Quantity	N/A

static load capacity:	22600 N
maximum rpm (grease):	6100 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	24400 N
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	6 100 r/min
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	22,6 kN
Basic dynamic load rating (C)	24,4 kN
Maximum Capacity / Filling Slot	No