


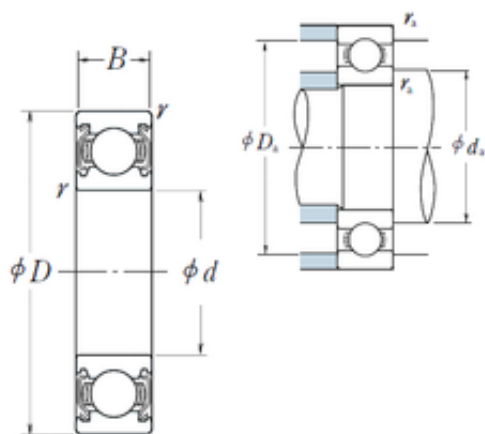

Bearing No. 6915ZZ

r	1
d	75 mm
D	105 mm
B	16 mm
C	16 mm
fo	16.5
D_	105
B_	16
ra	1
Z_	18
C0	22.6
DI_	81.269
SRE	4.52
D_a	100
DE_	98.731
SRI	4.52
DA_	8.731
SREN	0
Noun	Bearing
SRIN	-0.02
bomp	0
SRIX	0.02
yobi	6915ZZ
mass	0.364
SDM_	90
KBRG	6141
SREX	0.02
SBRG	19
Bore	2.953 Inch 75 Millimeter

da max	82 mm
Weight	0,364 Kg
da min	80
r min.	1 mm
UNSPSC	31171504
ALPHA_	0
LangID	1
C_conv	24400
Da max.	100 mm
ra max.	1 mm
da min.	80 mm
hidYobi	6915ZZ
GRS rpm	6000
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	75x105x16
Snap Ring	No
Inventory	0.0
Prod_Type3	DGBB_SR_ZZ
Width (mm)	16
bore type:	Round
Weight / LBS	0.36
Product Group	B00308
closure type:	Double Shielded
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6915ZZ
overall width:	16 mm
Keyword String	Ball
bore diameter:	75 mm
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
Outside Diameter	4.134 Inch 105 Millimeter
Long Description	75MM Bore; 105MM Outside Diameter; 16MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.63 Inch 16 Millimeter
Weight / Kilogram	0.36
outside diameter:	105 mm
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	75
internal clearance:	Normal Clearance
Outer Diameter (mm)	105
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
manufacturer upc number:	029176069567
Manufacturer Item Number	6915ZZ
Internal Special Features	No
(Grease) Lubrication Speed	6 000 r/min
Basic dynamic load rating (C)	24,4 kN
Basic static load rating (C0)	22,6 kN
Maximum Capacity /	No

Filling Slot	
--------------	--