


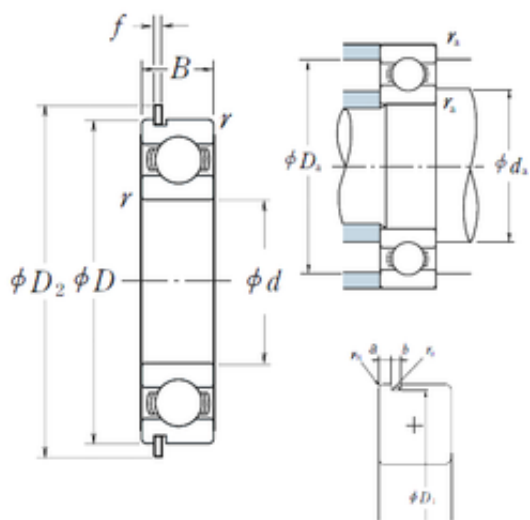

Bearing No. 6912NR

f	1,12 mm
r	1
d	60 mm
D	85 mm
B	13 mm
C	13 mm
a	2,1 mm
b	1,3 mm
D2	89,4 mm
B_	13
Cy	2.9
ra	1
C0	16.3
fo	16.2
D_	85
D1	82,9 mm
rn	0,5 mm
Z_	16
Dx	91
ro	0.4
DE_	80.438
DA_	7.938
SRI	4.11
D_a	80
SRE	4.11
DI_	64.562
SRIN	-0.02
yobi	6912NR
SBRG	19
bomp	0

SREX	0.02
KBRG	6101
SREN	-0.02
SDM_	72.5
SRIX	0.02
mass	0.192
C_conv	19400
r min.	1 mm
da max	66 mm
ALPHA_	0
Weight	0,192 Kg
da min	65
LangID	1
GRS rpm	7500
Da max.	80 mm
hidYobi	6912NR
Oil rpm	9000
da min.	65 mm
r0 max.	0,4 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Size (mm)	60x85x13
Prod_Type3	DGBB_SR_NR_OT
Width (mm)	13
Bearing number	6912NR
Bore Diameter (mm)	60
Outer Diameter (mm)	85
(Oil) Lubrication Speed	9 000 r/min
(Grease) Lubrication Speed	7 500 r/min
Basic dynamic load rating (C)	19,4 kN
Basic static load rating	16,3 kN

(C0)	
------	--