


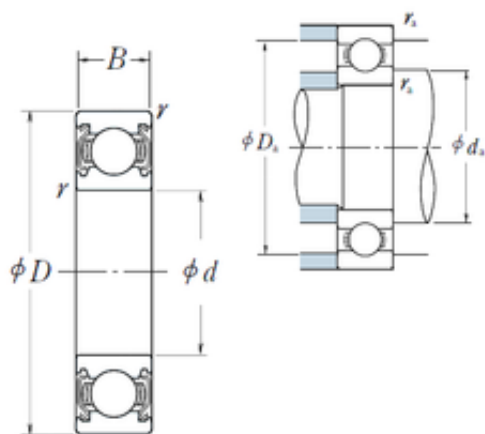

Bearing No. 6911ZZ

D	80 mm
d	55 mm
B	13 mm
C	13 mm
r	1
Z_	16
B_	13
D_	80
ra	1
C0	13.3
fo	16.2
DI_	60.356
SRI	3.7
D_a	75
DE_	74.644
DA_	7.144
SRE	3.7
SRIN	-0.02
SBRG	19
yobi	6911ZZ
SDM_	67.5
SREX	0.02
KBRG	6141
bomp	0
mass	0.189
Bore	2.165 Inch 55 Millimeter
SRIX	0.02
SREN	-0.02
Noun	Bearing

ALPHA_	0
da min	60
LangID	1
r min.	1 mm
UNSPSC	31171504
da max	61,5 mm
C_conv	16000
Weight	0,189 Kg
ra max.	1 mm
hidYobi	6911ZZ
GRS rpm	8000
Da max.	75 mm
da min.	60 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	55x80x13
Enclosure	2 Metal Shields
Inventory	0.0
Width (mm)	13
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.4167
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6911ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.15 Inch 80 Millimeter

Long Description	55MM Bore; 80MM Outside Diameter; 13MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.512 Inch 13 Millimeter
Weight / Kilogram	0.183
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	55
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	8 000 r/min
Basic static load rating (C0)	13,3 kN
Basic dynamic load rating (C)	16 kN
Maximum Capacity / Filling Slot	No