


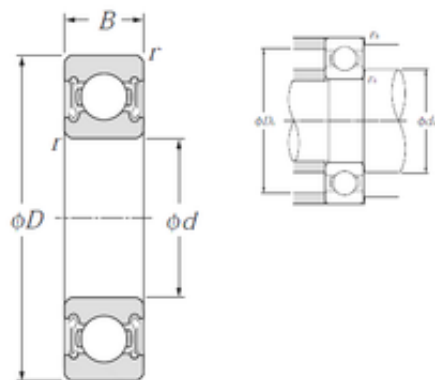

Bearing No. 6910LLB

C	12 mm
d	50 mm
D	72 mm
B	12 mm
Bore	1.969 Inch 50 Millimeter
Noun	Bearing
Weight	0,132 Kg
r min.	0,6 mm
da max	55,5 mm
UNSPSC	31171504
da min.	54 mm
Da max.	68 mm
ra max.	0,6 mm
Category	Single Row Ball Bearing
Size (mm)	50x72x12
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	12
bore type:	Round
Weight / LBS	0.302
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	50 mm
Keyword String	Ball
overall width:	12 mm
cage material:	Steel

fillet radius:	0.6 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal
Bearing number	6910LLB
Enclosure Type	Non-Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.472 Inch 12 Millimeter
Long Description	50MM Bore; 72MM Outside Diameter; 12MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.835 Inch 72 Millimeter
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0
inner ring width:	12 mm
outer ring width:	12 mm
outside diameter:	72 mm
Bore Diameter (mm)	50
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring

Outer Diameter (mm)	72
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	11200 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	8900 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	13400 N
Internal Special Features	No
(Grease) Lubrication Speed	8 900 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	11,2 kN
Basic dynamic load rating (C)	13,4 kN
Maximum Capacity / Filling Slot	No