


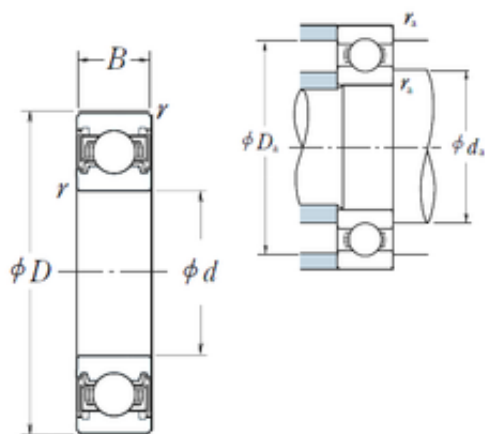

Bearing No. 6909VV

r	0.6
d	45 mm
D	68 mm
B	12 mm
C	12 mm
D_	68
B_	12
ra	0.6
C0	10.9
fo	15.9
Z_	15
DI_	49.753
SRE	3.49
D_a	64
DE_	63.247
DA_	6.747
SRI	3.49
SREN	-0.02
SBRG	19
SREX	0.02
KBRG	6151
Bore	1.772 Inch 45 Millimeter
mass	0.126
Noun	Bearing
SRIX	0.02
SRIN	-0.02
SDM_	56.5
bomp	0
yobi	6909VV

Weight	0,126 Kg
LangID	1
da max	50 mm
C_conv	14100
ALPHA_	0
da min	49
UNSPSC	31171504
r min.	0,6 mm
hidYobi	6909VV
ra max.	0,6 mm
GRS rpm	9500
Da max.	64 mm
da min.	49 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	No
Size (mm)	45x68x12
Enclosure	2 Seals
Inventory	25.0
Width (mm)	12
bore type:	Round
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.13
Product Group	B00308
Cage Material	Steel
closure type:	Double Sealed
Inch - Metric	Metric
Bearing number	6909VV
Keyword String	Ball
overall width:	12 mm
Enclosure Type	Non-Contact Seal
bore diameter:	45 mm

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	45MM Bore; 68MM Outside Diameter; 12MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.472 Inch 12 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	0.06
outside diameter:	68 mm
Bore Diameter (mm)	45
Internal Clearance	C0-Medium
Outer Diameter (mm)	68
internal clearance:	Normal Clearance
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6909VV
manufacturer upc number:	029176030093
Internal Special Features	No
(Grease) Lubrication Speed	9 500 r/min
Basic static load rating (C0)	10,9 kN
Basic dynamic load rating (C)	14,1 kN

Maximum Capacity / Filling Slot	No
------------------------------------	----