


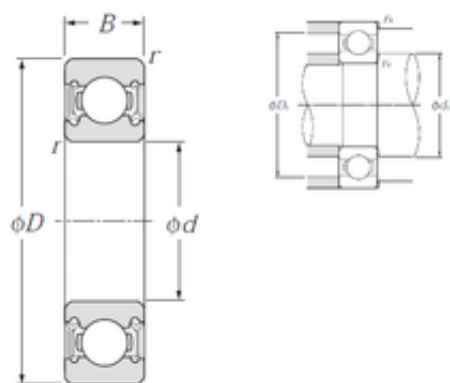

Bearing No. 6315LLU

C	37 mm
d	75 mm
D	160 mm
B	37 mm
Bore	2.953 Inch 75 Millimeter
Noun	Bearing
Weight	3,02 Kg
r min.	2,1 mm
da max	99 mm
UNSPSC	31171504
da min.	86 mm
Da max.	149 mm
ra max.	2 mm
Category	Single Row Ball Bearing
Size (mm)	75x160x37
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	37
bore type:	Round
Weight / LBS	6.66
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	75 mm
Keyword String	Ball
overall width:	37 mm
cage material:	Steel

fillet radius:	2.1 mm
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
Bearing number	6315LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Reference speed	2 900 r/min
Outside Diameter	6.299 Inch 160 Millimeter
Long Description	75MM Bore; 160MM Outside Diameter; 37MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	1.457 Inch 37 Millimeter
outside diameter:	160 mm
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
inner ring width:	37 mm
outer ring width:	37 mm
Weight / Kilogram	3.054

Bore Diameter (mm)	75
Internal Clearance	C0-Medium
Outer Diameter (mm)	160
snap ring included:	Without Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	77000 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	2900 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	113000 N
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	77 kN
Basic dynamic load rating (C)	113 kN
Maximum Capacity / Filling Slot	No