


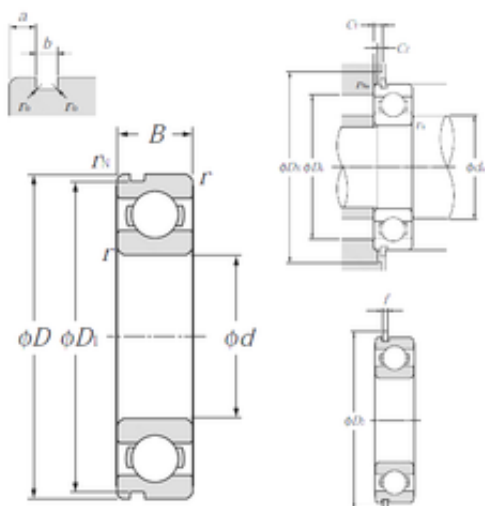

Bearing No. 6906NR

|                               |              |
|-------------------------------|--------------|
| b                             | 0,95 mm      |
| a                             | 1,7 mm       |
| f                             | 0,85 mm      |
| d                             | 30 mm        |
| D                             | 47 mm        |
| B                             | 9 mm         |
| C                             | 9 mm         |
| D2                            | 49,8 mm      |
| D1                            | 45,7 mm      |
| Cy                            | 2,3 mm       |
| Dx                            | 50,5 mm      |
| rn                            | 0,3 mm       |
| Cz                            | 0,9 mm       |
| r min.                        | 0,3 mm       |
| Weight                        | 0,048 Kg     |
| da max                        | 34 mm        |
| da min.                       | 32 mm        |
| Da max.                       | 45 mm        |
| ra max.                       | 0,3 mm       |
| r0 max.                       | 0,25 mm      |
| Size (mm)                     | 30x47x9      |
| Width (mm)                    | 9            |
| Bearing number                | 6906NR       |
| Bore Diameter (mm)            | 30           |
| Outer Diameter (mm)           | 47           |
| (Oil) Lubrication Speed       | 17 000 r/min |
| (Grease) Lubrication Speed    | 14 000 r/min |
| Basic dynamic load rating (C) | 7,25 kN      |
| Basic static load rating      | 5 kN         |

|      |  |
|------|--|
| (C0) |  |
|------|--|